


Инструкция

Сгибание ног лежа Impulse IFP1604

Полезные ссылки:

[Сгибание ног лежа Impulse IFP1604 - смотреть на сайте](#)

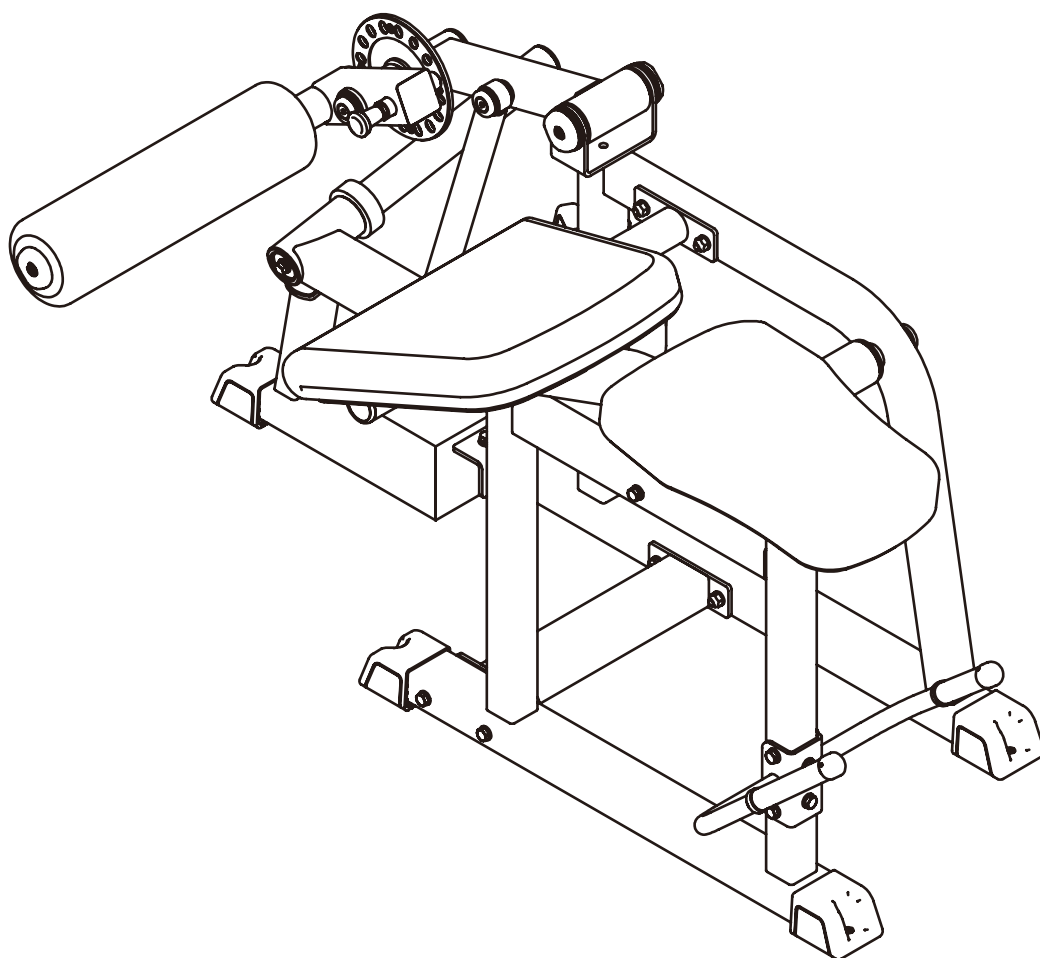

IFP1604

Prone Leg Curl OWNER'S MANUAL

22D

CAUTION! Read all precautions and instructions in this manual before using this equipment.

Table Of Contents

CAUTION!

Read all precautions and instructions in this manual before using this equipment.

Important Safety Instructions-----	3
Instructions-----	5
Exploded View and Parts List-----	6
Measurement Guide-----	13
Assembly Instructions-----	14
Assembly-----	15
Adjust and Exercise Instruction-----	20
Maintenance Schedule-----	21
General Maintenance Information-----	22
Weight Training Tips-----	23

Important Safety Instructions

Before beginning any fitness program, you should obtain a complete physical examination from your physician. When using exercise equipment, basic precautions should always be taken, including the following:

1. Read all instructions before using the equipment.
These instructions are written to ensure your safety and to protect the unit.
2. Use the equipment only for its intended purpose as described in this guide.
Do not use accessory attachments that are not recommended by the manufacturer: such attachments might cause injuries.
3. The product should only be used on a level surface and is with 0.6 meters space around the product.
Do not use the equipment outdoors.
4. Do not allow children on or near the equipment. And children are not allowed to use this equipment.
Teenagers should use this equipment with adult supervision.
5. Do not overexert yourself or work to exhaustion.
Do not attempt to lift more weight than you can control safely.
If you feel any pain or abnormal symptoms, stop your workout immediately and consult your physician.
6. This equipment is not used as medical apparatus and instruments.
7. Never operate the unit when it has been dropped or damaged.
Never drop or insert anything into any opening in the equipment.
Always check the unit and its cables before each use. Make sure that all fasteners and cables are secure and in good working condition.
Frayed or worn cables can be dangerous and may cause injury. Periodically check these cables for any indication of wear.
Keep hands, limbs, loose clothing and long hair well out of the way of moving parts.
8. Be careful when getting on or off the equipment.
9. Wear proper exercise clothing and shoes for your workout, no loose clothing.


Important Safety Instructions

Personal Safety During Assembly

Read each step in the assembly instructions and follow the steps in sequence. Do not skip ahead. If you skip ahead, you may learn later that you have to disassemble components and that you may have damaged the equipment.

Assemble and operate the equipment on a solid, level surface. Locate the unit a few feet from walls or furniture to provide easy access. The equipment is designed for your enjoyment. By following these precautions and using common sense, you will have many safe and pleasurable hours of healthful exercise with the equipment.

Training Area and Free Area

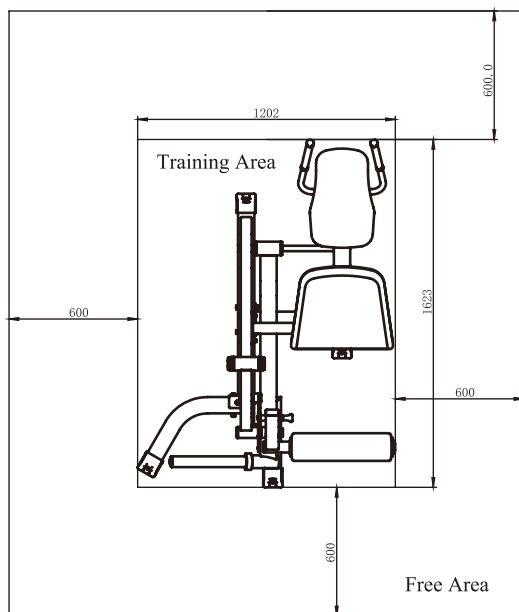

Specifications

Class: S

Maximum Wt. Capacity: 150kg/ 330lbs

Maximum User Weight: 150kg/ 330lbs

Product Dimension: 1623*1202*798mm

Product Total Surface: 1623*1202mm


Product Total Mass:

Instructions


Before beginning assembly please take the time to read instructions thoroughly. Please use the various lists in this manual to make sure that all parts have been included in your shipment. When ordering, use part number and description from the lists. Use only our replacement part when servicing. Failure to do so will void your warranty and could result in personal injury.

The equipment is designed to provide the smoothest, most effective exercise motion possible. After assembly, you should check all functions to ensure correct operation. If you experience problems, first recheck the assembly instructions to locate any possible errors made during assembly. If you are unable to correct the problem, call your authorized dealer. Be sure to have your serial number and this manual when calling. When all parts have been accounted for, continue on.


Tools Required




Ratchet Wrench and Socket




Adjustable Wrench



Rubber Mallet



Hex Key Wrench Set



Phillips Screwdriver


Exploded View and Parts List

Overall

Item No.	Part No.	Description	QTY
1	IFP160401ASSY	Main Frame ASSY	1
2	IFP160402ASSY	Cushion Frame ASSY	1
3	IFP16040300	Bottom Connection Frame	1
4	IFP160404ASSY	Swing Frame ASSY	1
5	IFP160405ASSY	Handle Frame ASSY	1
6	IFP160510ASSY	FOAM Frame ASSY	1
7	IFP160407ASSY	Connect Frame ASSY	1
8	IFP160408ASSY	Upper Connection Frame ASSY	1
9	IFP16040900	Long Shaft	1
10	IFP160410ASSY	Long Swing Frame ASSY	1
11	IFP160411ASSY	Front Base Frame ASSY	1
12	IFP160412ASSY	Weight Horn ASSY	1
13	IF93012600	Shaft	1
14	IF93215100V2	Chest Pad	1
15	IF81241100V6	FOAM Assembly	1
16	IFP16041400	Seat Pad	1
17	IN-D21202000	End Cap $\Phi 38 \times \Phi 10.5 \times 8$	4
18	FE97211900	Cap $\Phi 60$	3
19	FE97212000	Circle Ring $\Phi 62.5 \times 5$	2
20	IT80053700	Big Collar $\Phi 90 \times \Phi 51.5 \times 6$	2
21	IF93062200	Big Flat Washer $\Phi 62 \times \Phi 10.5 \times 3$	2
22	HF985A1500	Bumper $\Phi 76 \times \Phi 42 \times 25$	1
23	IT80011800DS	Adjustable Ring	2
24	CWP311004-101	Big Flat Washer $\Phi 60 \times \Phi 26 \times 3$	2
25	GB894.125FH12	Retaining Snap Ring	1
26	GB9510DHS2	Flat Washer $\Phi 11 \times \Phi 20 \times 2$	36
27	GB9310DHS12	Spring Washer $\Phi 10$	6
28	CNLM10*25DHS20	Flat Head Cap Screw M10*25	4
29	GB70M10*25DHS20	Socket Head Cap Screw M10*25	3
30	GB5781M10*30DHS20	Hex Head Bolt M10*30	4
31	GB5780M10*75DHS20	Hex Head Bolt M10*75	11
32	GB5780M10*80DHS20	Hex Head Bolt M10*80	2
33	GB5780M10*100DHS20	Hex Head Bolt M10*100	6
34	NM10DHS2	Nylon Lock Nut M10	12
35	HVSE1113	Spacer $\Phi 31.8 \times \Phi 25.4 \times 35$	1
36	NBS4DHS	Key S=8	1
37	NBS6DHS	Key S=6	1
38	NBS8DHS	Key S=4	1

Exploded View and Parts List


Overall

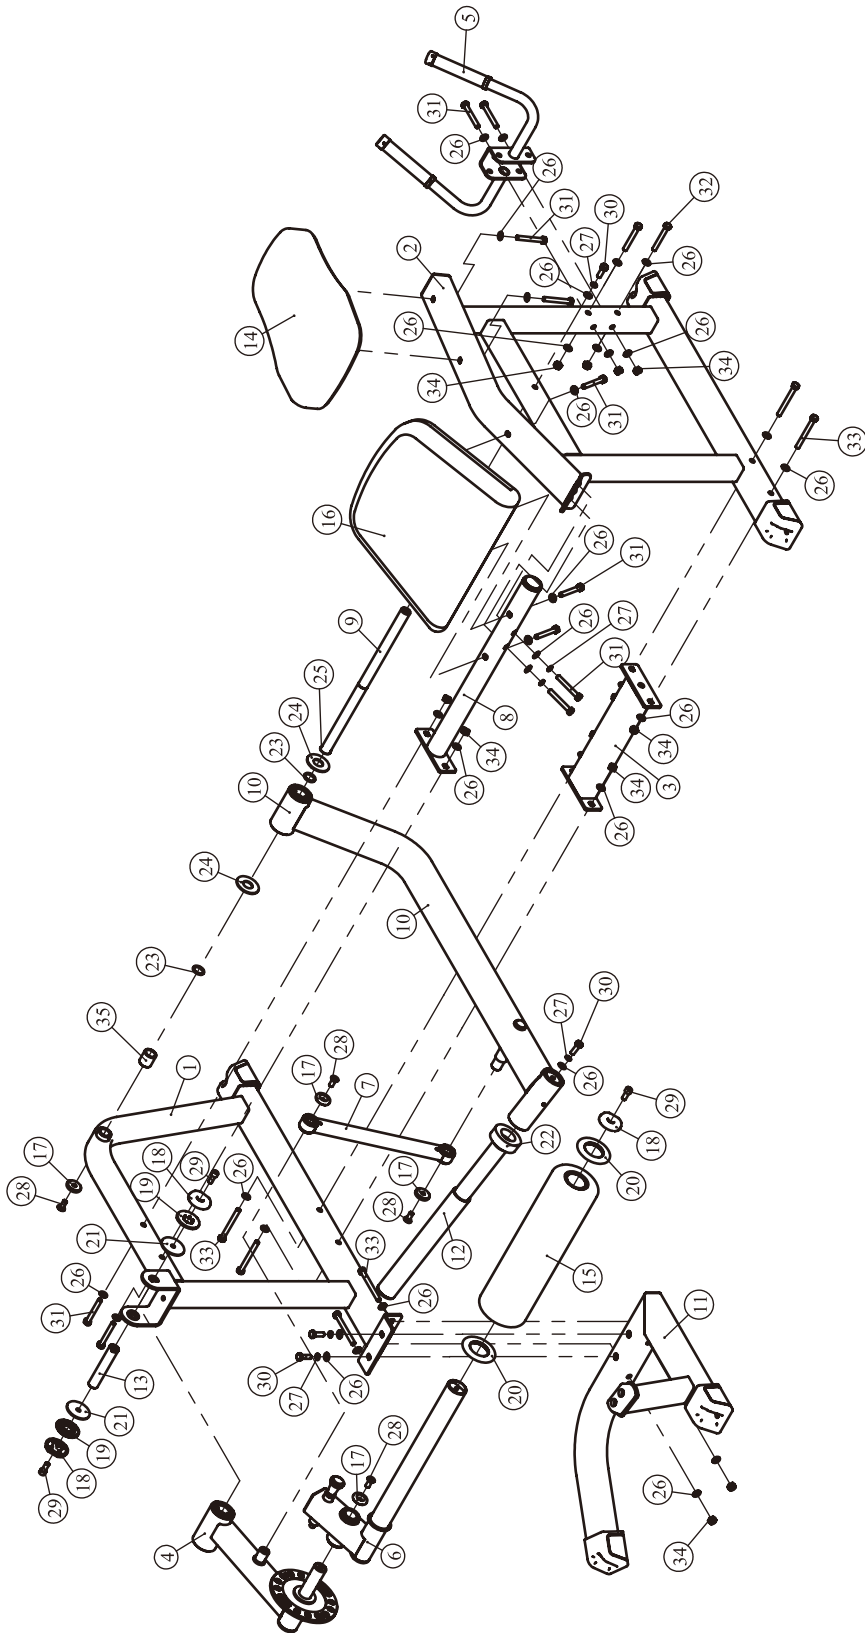

Exploded View and Parts List

Main Frame ASSY

Cushion Frame ASSY

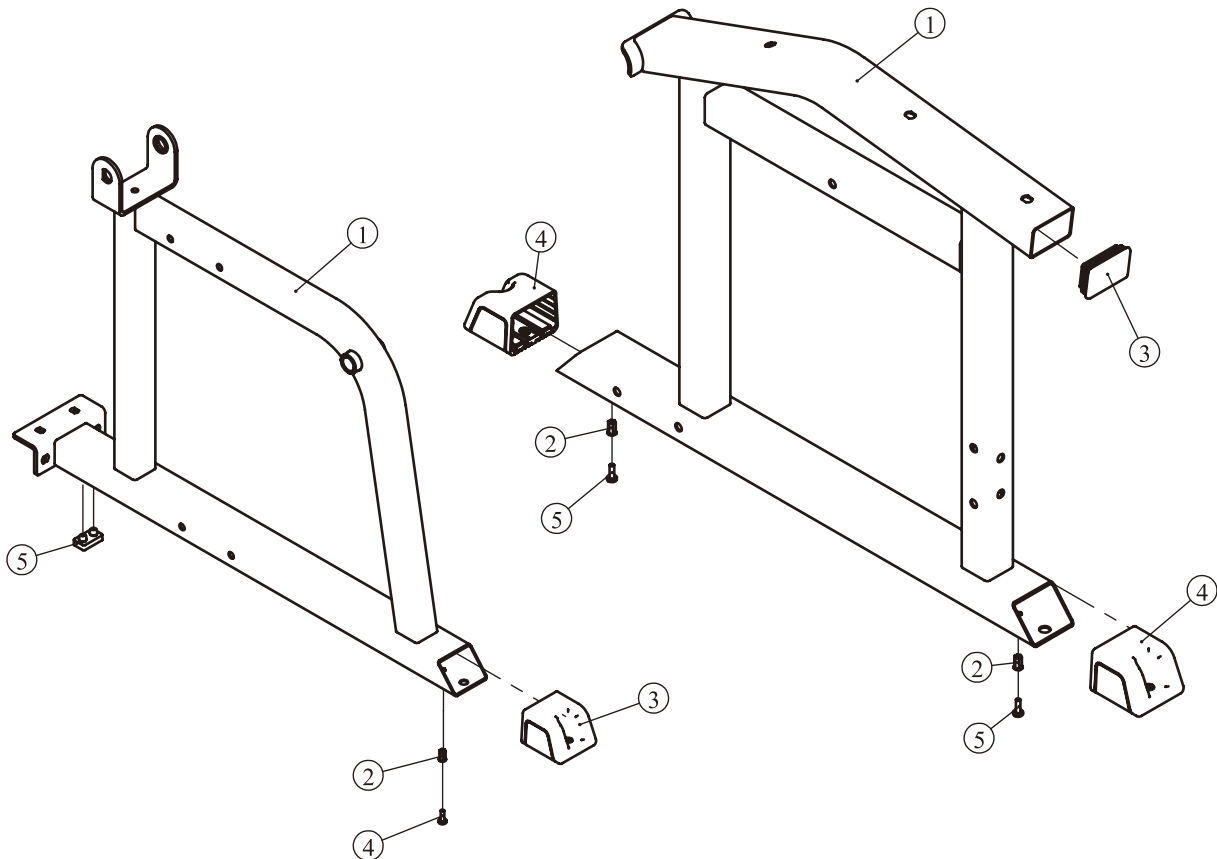


Grade No.	Part No.	Description	QTY
1.1	IFP16040100	Main Frame	1
1.2	GB17880.5M6*16.5DS17	Rivet Nut M6	1
1.3	IFP12013300	Bottom Plug	1
1.4	GB818M6*20DHS2	U-nut M6*20	1
1.5	83004700	Bumper 45*25*10	1


Grade No.	Part No.	Description	QTY
2.1	IFP16040200	Cushion Frame	1
2.2	GB17880.5M6*16.5DS17	Rivet Nut M6	2
2.3	KPSFID2800	Plug □50.8*76.2	1
2.4	IFP12013300	Bottom Plug	2
2.5	GB818M6*20DHS2	U-nut M6*20	2

Exploded View and Parts List

Swing Frame ASSY

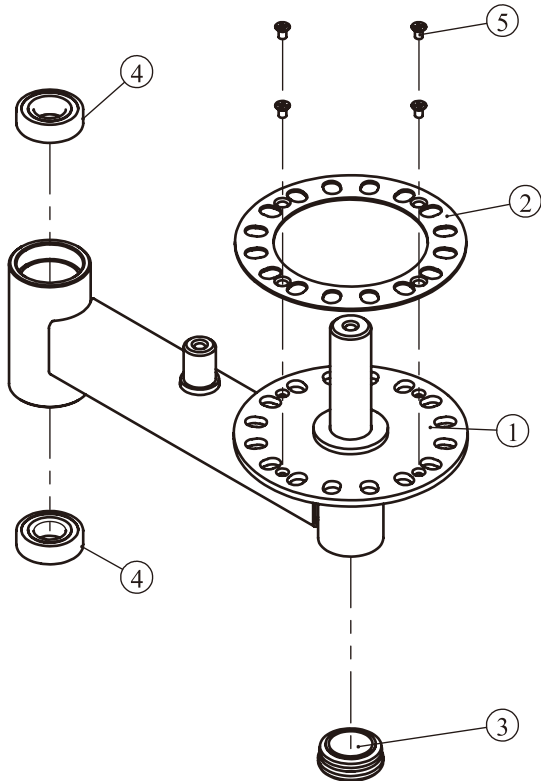

Handle Frame ASSY

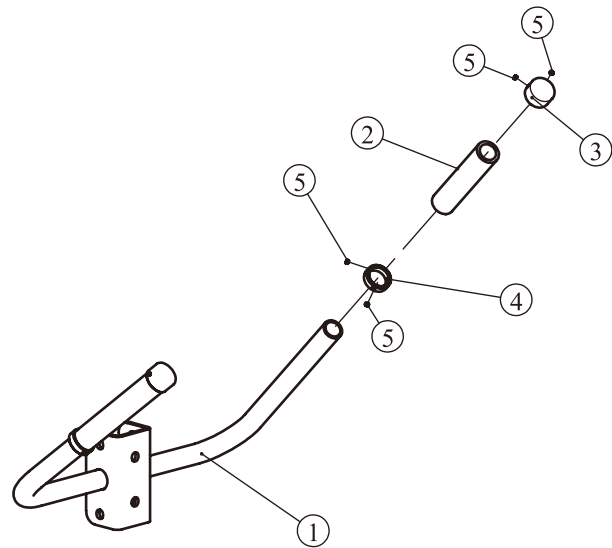


Grade No.	Part No.	Description	QTY
4.1	IFP16040400	Swing Frame	1
4.2	IF93051500	Wear Plate	1
4.3	B10009900	Plug $\Phi 50.8$	1
4.4	GB2766205-2ZC3	Bearing 6205	2
4.5	GB819M6*10DS2	Philips Countersunk Screw M6*10	4


Grade No.	Part No.	Description	QTY
5.1	IFP16040500	Handle Frame	1
5.2	FE97031800	Grip ST $\Phi 31 * \Phi 24 * 130$	2
5.3	V39600	Aluminum Grip Cap	2
5.4	V39500	Aluminum Grip Ring	2
5.5	YZGB7710-32*3.2N19	Socket Set Screw 10-32UNF*3.2	8

Exploded View and Parts List

FOAM Frame ASSY

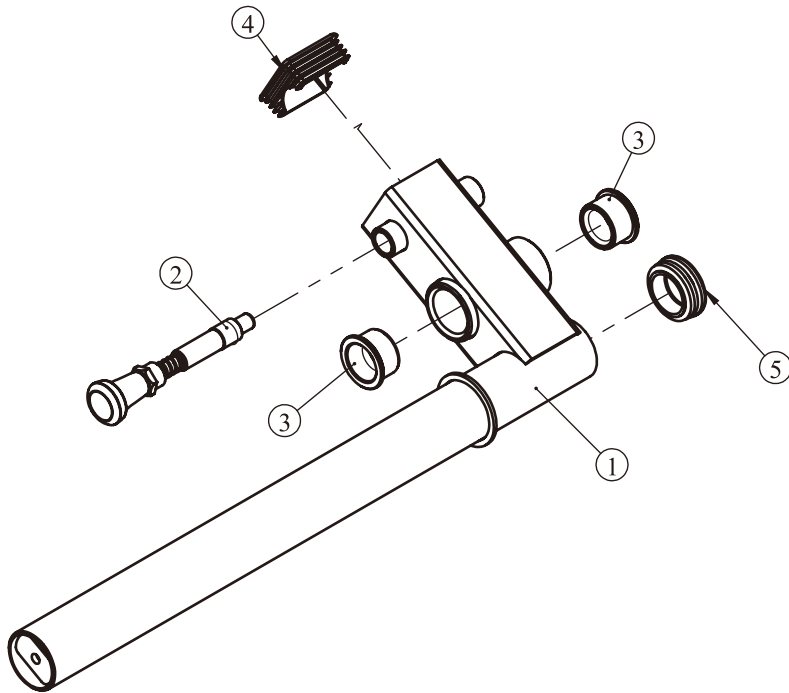

Connect Frame ASSY

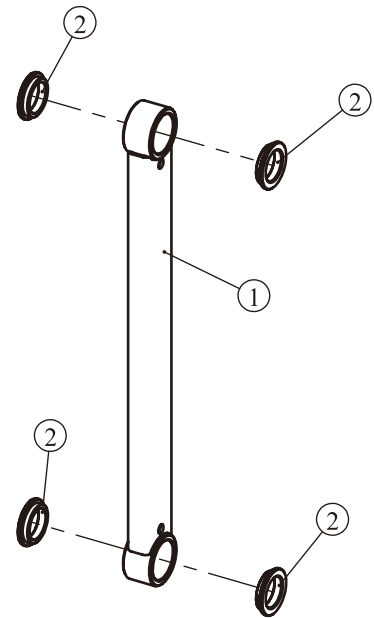



Grade No.	Part No.	Description	QTY
6.1	IFP16051000	FOAM Frame	1
6.2	SL70461800	Pin ASSY	1
6.3	CWS134005-101	Bushing $\Phi 45 * \Phi 38 * \Phi 32 * 25$	2
6.4	IPB-XL0011900	Plug $\square 60$	1
6.5	B10009900	Plug $\Phi 50.8$	1

Grade No.	Part No.	Description	QTY
7.1	IFP16040700	Connect Frame	1
7.2	FE97085100	Bushing $\Phi 38 * \Phi 25 * 7.5$	4

Exploded View and Parts List

Upper Connection Frame

Long Swing Frame ASSY

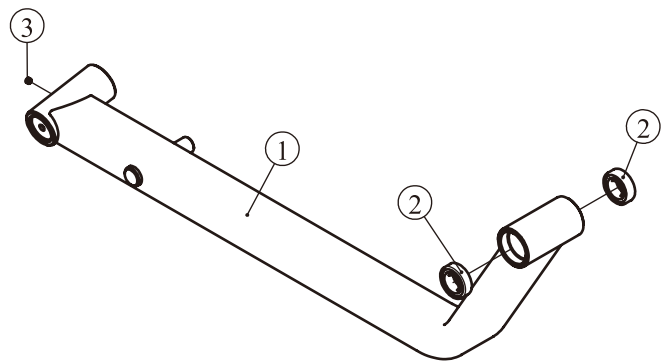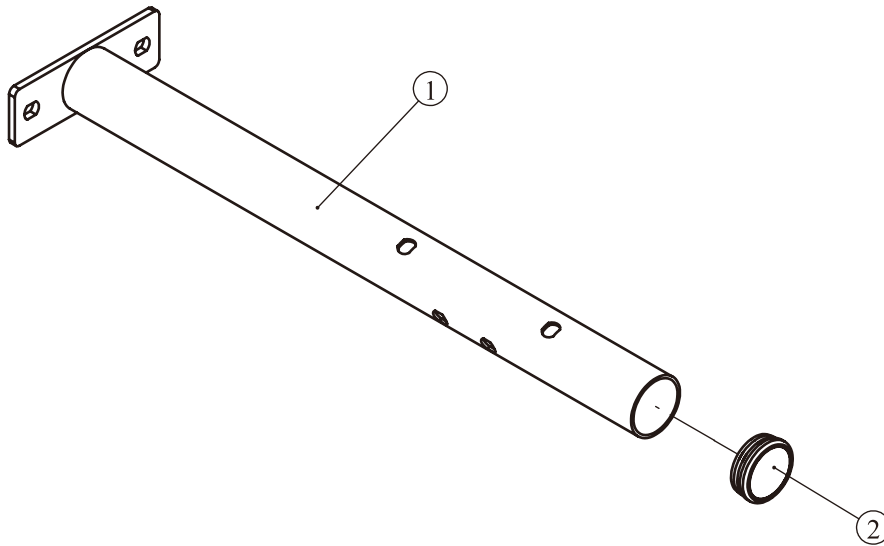


Grade No.	Part No.	Description	QTY
8.1	IFP16040800	Upper Connection	1
8.2	B10009900	Plug $\Phi 50.8$	1


Grade No.	Part No.	Description	QTY
10.1	IFP16041000	Long Swing Frame	1
10.2	GB2766205-2ZC3	Bearing 6205	2
10.3	GB77M8*6DHS2	Socket Set Screw M8*6	1

Exploded View and Parts List

Front Base Frame ASSY

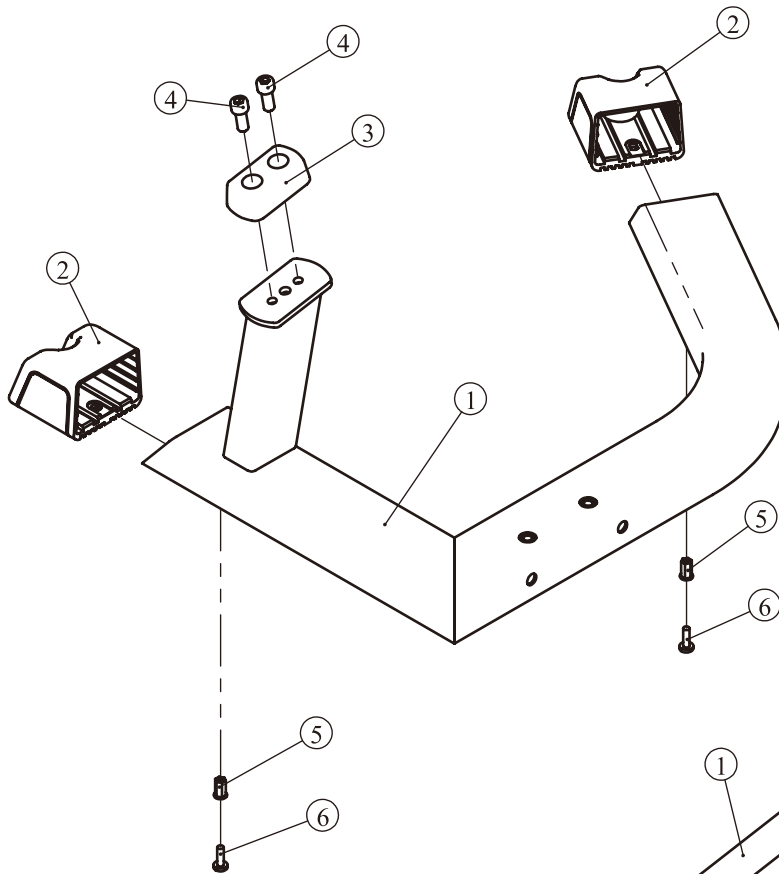



Weight Horn ASSY

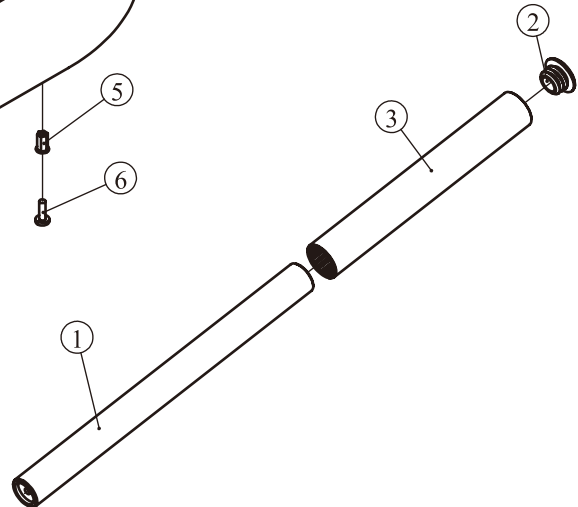

Grade No.	Part No.	Description	QTY
11.1	IFP16041100	Front Base Frame	1
11.2	IFP12013300	Bottom Plug	2
11.3	RS17000400	Bumper	1
11.4	GB70M10*25DHS20NL	Socket Head Cap Screw M10*25	2
11.5	GB17880.5M6*16.5DS17	Rivet Nut M6	2
11.6	GB818M6*20DHS2	U-nut M6*20	2

Grade No.	Part No.	Description	QTY
12.1	IFP16041200	Weight Horn	1
12.2	IFP16053100	Plug $\Phi 49 \times 25$	1
12.3	IFP16053000	Sleeve $\Phi 50 \times \Phi 42.1 \times 350$	1

Measurement Guide

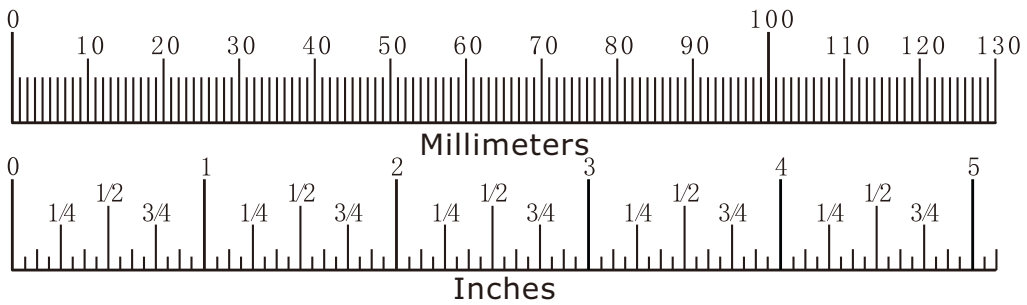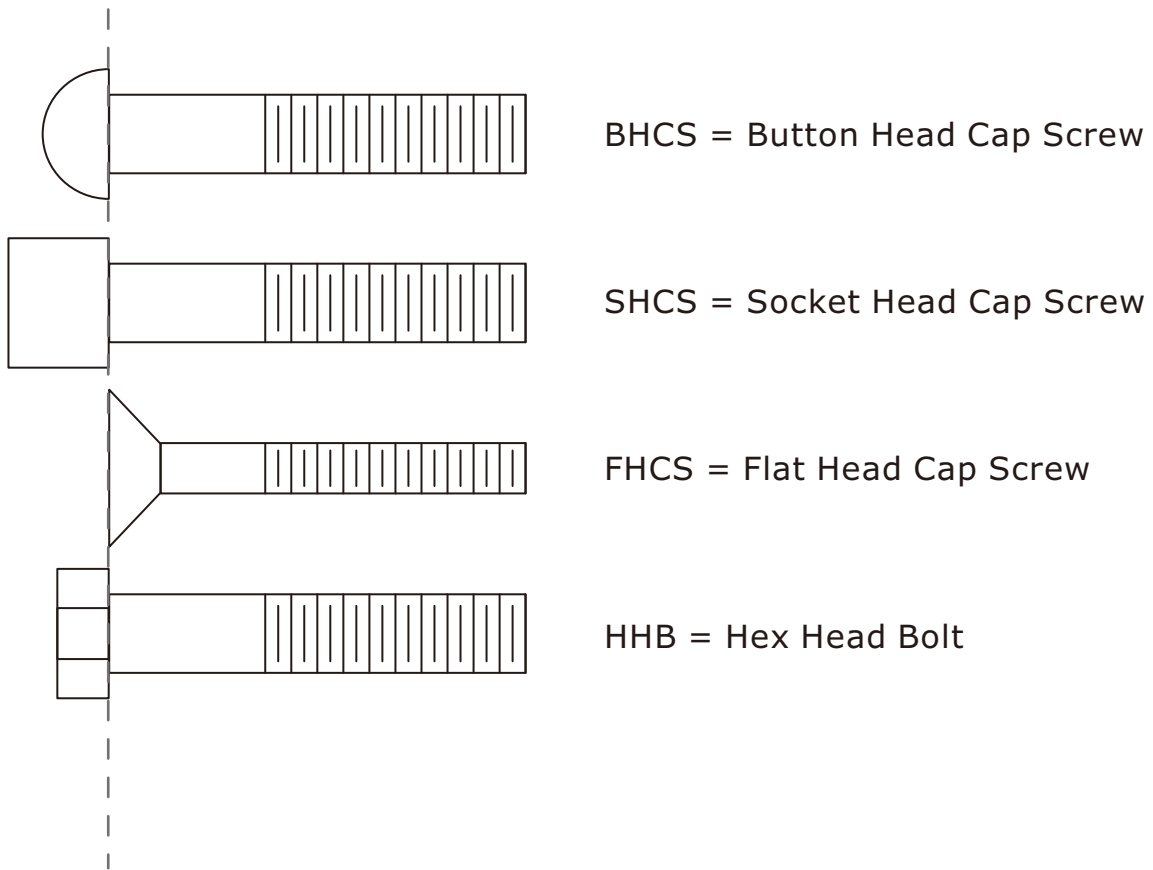

Diameter of bolt (mm/inch)	M6(1/4")	M8(5/16")	M10(3/8")	M12(1/2")	M16(5/8")
Tightening torque (N.m)	9~12	22~30	45~59	78~104	193~257
Operational methods for adult men	The strength of the wrist	The strength of the wrist and forearm	The strength of the entire arm	The strength of the arm and upper body	with all strength

Assembly Instructions

Assembly of the equipment takes professional installers about 2 hours. If this is the first time you have assembled this type of equipment, plan to spend more time. It is strongly recommended to assemble the equipment by professional installers. You may find it quicker, safer, easier to assemble this equipment with the help of a friend, as some of components may be large, heavy or awkward to handle alone. It is important that you assemble your product in a clean, clear, uncluttered area. This will enable you to move around the product while you are fitting components and reduce the possibility of injury during assembly.

NOTE


As with any assembled part, proper alignment and adjustment is critical. While tightening the fasteners, be sure to leave room for adjustments. Do not fully tighten the fasteners until instructed to do so. Be careful to assemble the components in the sequence presented in this guide.

Assembly

STEP 1

1. Attach the Front Base Frame ASSY (#11) to the Main Frame ASSY (#1) using:
 - six $\Phi 11*\Phi 20*2$ Flat Washer (#26)
 - two $\Phi 10$ Spring Washer (#27)
 - two M10*30 HHB (#30)
 - two M10*100 HHB (#33)
 - two M10 Nylon Lock Nut (#34)
2. Attach the Bottom Connection Frame (#3), the Upper Connection Frame ASSY (#8) to the Main Frame ASSY (#1) using:
 - eight $\Phi 11*\Phi 20*2$ Flat Washer (#26)
 - two M10*75 HHB (#31)
 - two M10*100 HHB (#33)
 - four M10 Nylon Lock Nut (#34)

Note: Wrench Tighten Bolts and Nylon Lock Nuts.

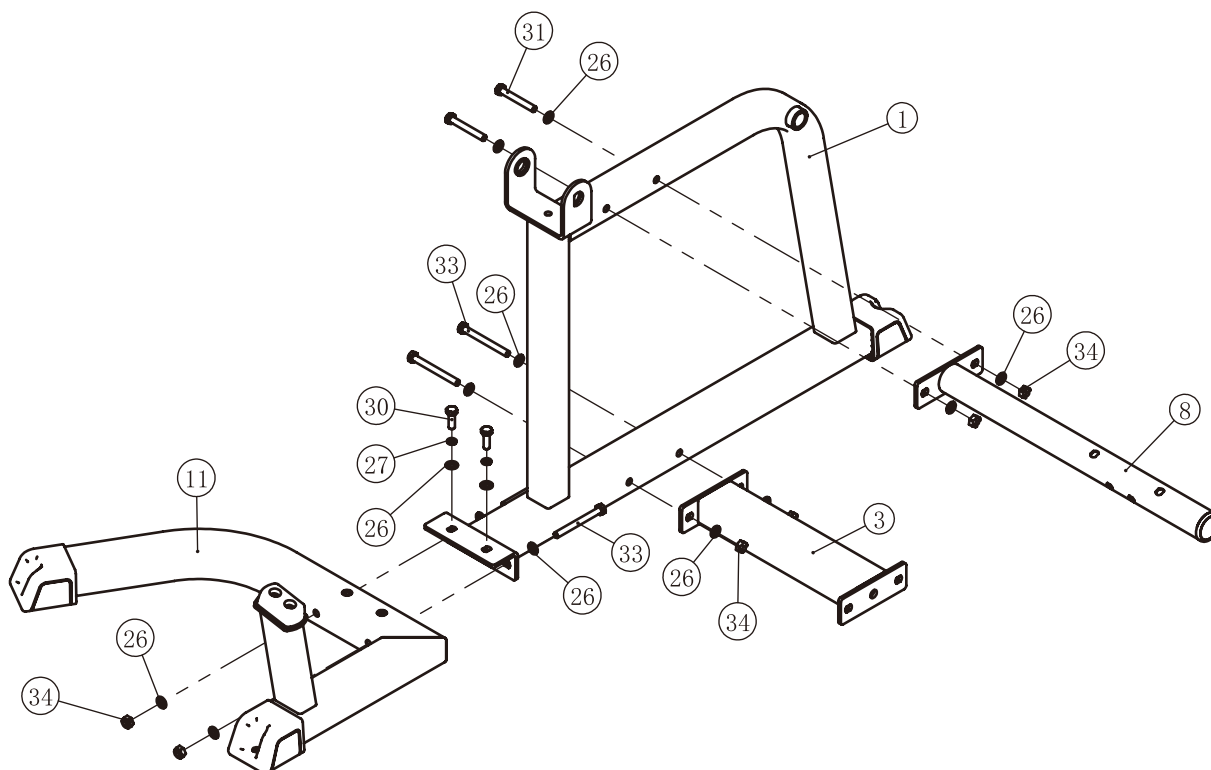


Assembly

STEP 2

Attach the Long Swing Frame ASSY (#10) and the Long Shaft (#9) to the Main Frame ASSY (#1) using:

- one End Cap $\Phi 38 \times \Phi 10.5 \times 8$ (#17)
- two Adjustable Ring $\Phi 30 \times 2.25 \times 3$ (#23)
- two Big Flat Washer $\Phi 60 \times \Phi 26 \times 3$ (#24)
- one Retaining Snap Ring $\Phi 25$ (#25)
- one Flat Head Cap Screw M10*25 (#28)
- one Spacer $\Phi 31.8 \times \Phi 25.4 \times 35$ (#35)

Note: Wrench Tighten Bolts and Nylon Lock Nuts.

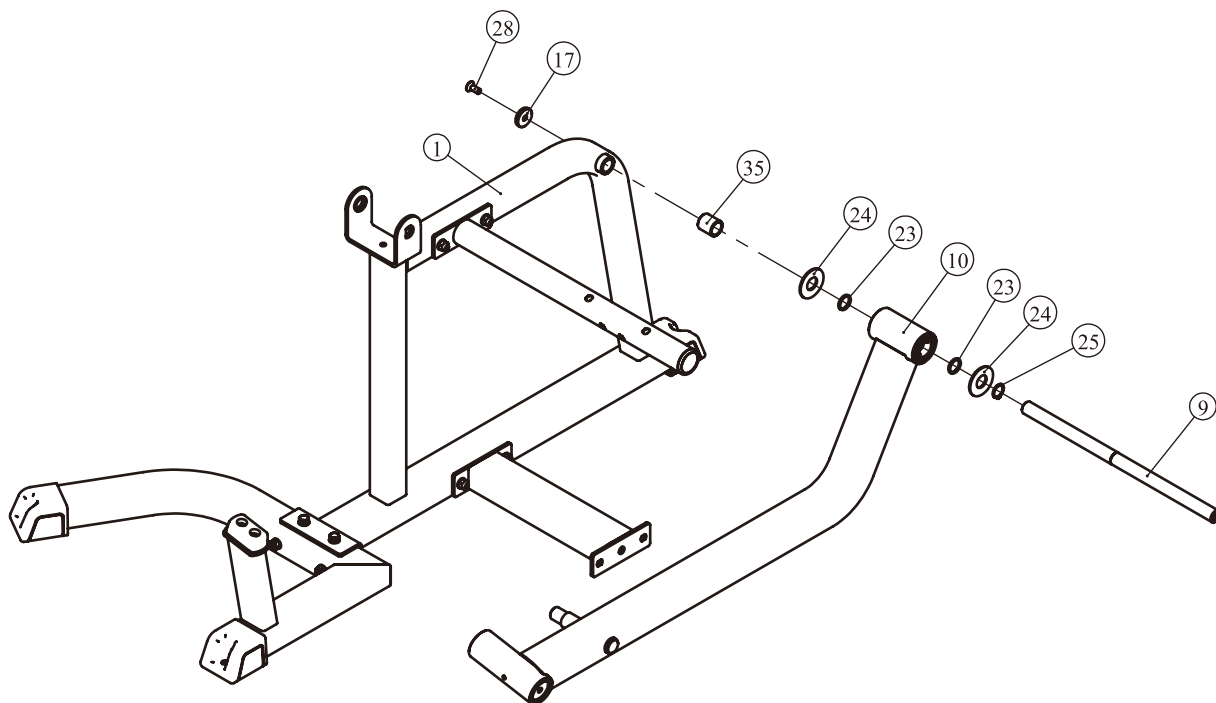


Assembly

STEP 3

1. Attach the Cushion Frame ASSY (#2) to the Main Frame ASSY (#1) using:
seven $\Phi 11 \times \Phi 20 \times 2$ Flat Washer (#26) two $\Phi 10$ Spring Washer (#27)
one M10*30 HHB (#30) two M10*75 HHB (#31)
two M10*100 HHB (#33) two M10 Nylon Lock Nut (#34)
2. Attach the Swing Frame ASSY (#4) and the Connect Frame ASSY (#7) to Long Swing Frame ASSY (#10) using:
two End Cap $\Phi 38 \times \Phi 10.5 \times 8$ (#17) two Flat Head Cap Screw M10*25 (#28)
3. Attach the Swing Frame ASSY (#4) to the Main Frame ASSY (#1) using:
one Shaft $\Phi 25 \times 133 \times M10$ (#13) two Cap $\Phi 60$ (#18)
two Circle Ring $\Phi 62.5 \times 5$ (#19) two Big Flat Washer $\Phi 62 \times \Phi 10.5 \times 3$ (#21)
two Socket Head Cap Screw M10*25 (#29)

Note: Wrench Tighten Bolts and Nylon Lock Nuts.

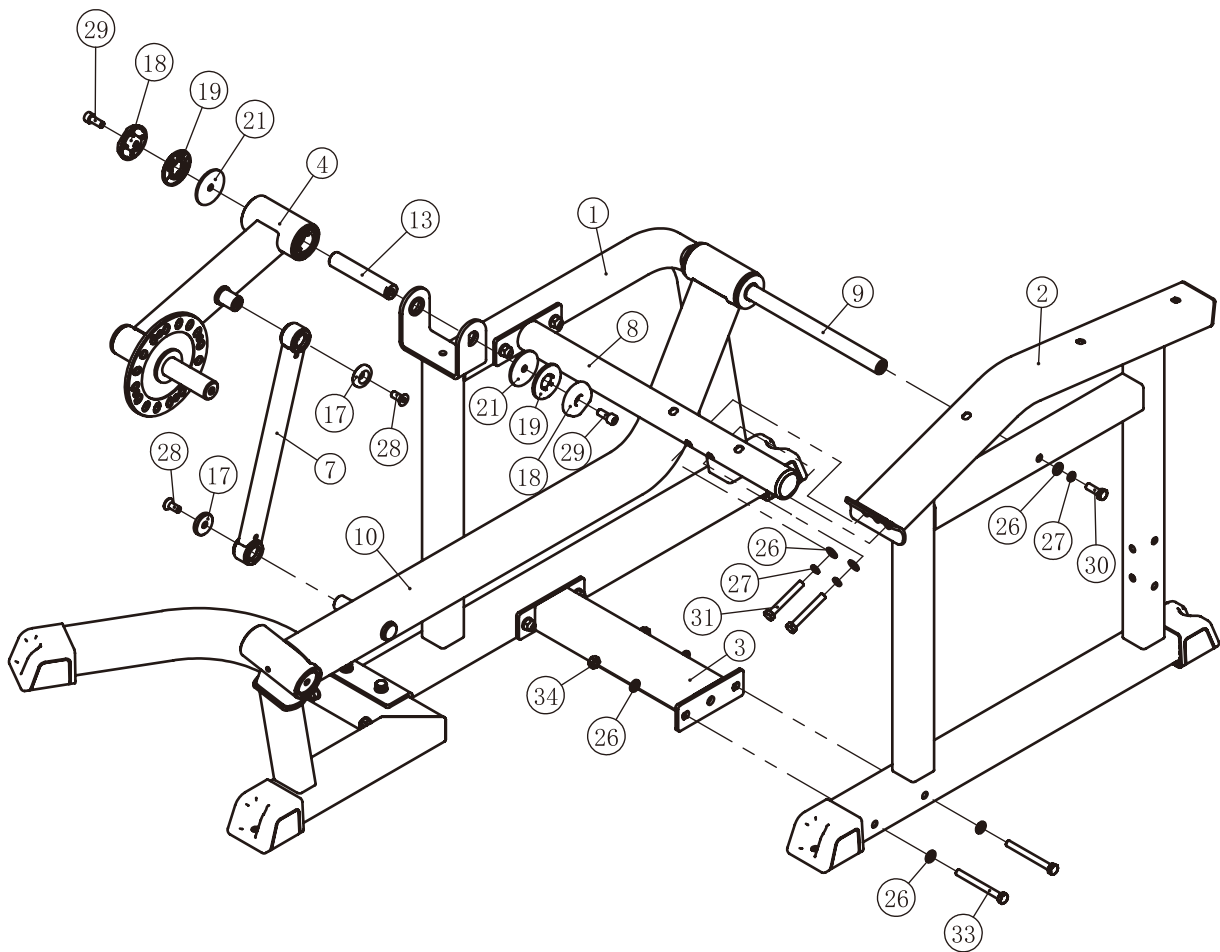


Assembly

STEP 4

1. Attach the Handle Frame ASSY (#5) to the Cushion Frame ASSY (#2) using:
 - eight $\Phi 11*\Phi 20*2$ Flat Washer (#26)
 - two M10*75 HHB (#31)
 - two M10*80 HHB (#32)
 - four M10 Nylon Lock Nut (#34)
2. Attach the FOAM Frame ASSY (#6) to the Long Swing Frame ASSY (#10) using:
 - one End Cap $\Phi 38*\Phi 10.5*8$ (#17)
 - one Flat Head Cap Screw M10*25 (#28)
3. Loosen the M8*6 screw and attach the Weight Horn ASSY (#12) and the Bumper $\Phi 76*\Phi 42*25$ (#22) to the Long Swing Frame ASSY (#10) using:
 - one $\Phi 11*\Phi 20*2$ Flat Washer (#26)
 - one $\Phi 10$ Spring Washer (#27)
 - one M10*30 HHB (#30)

Note: Wrench Tighten Bolts and Nylon Lock Nuts.

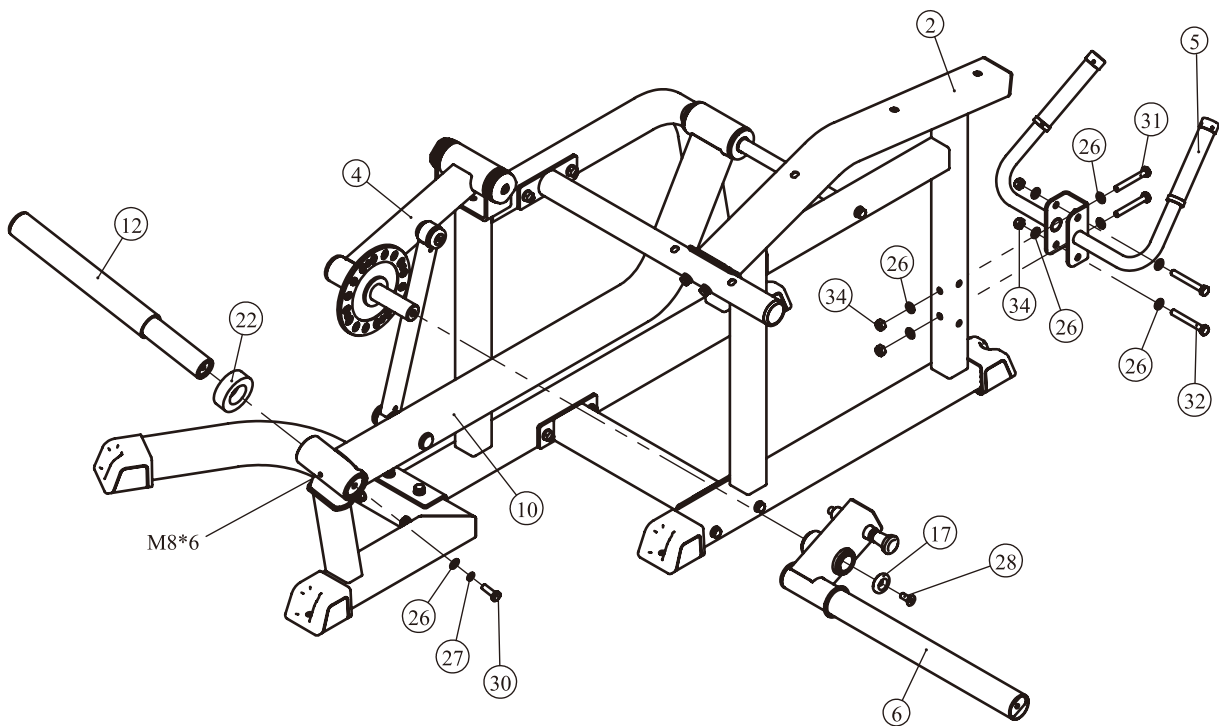


Assembly

STEP 5

1. Attach the Chest Pad (#14) and the Seat Pad(#16) to the Cushion Frame ASSY (#2) using:
 - five $\Phi 11*\Phi 20*2$ Flat Washer (#26)
 - five M10*75 HHB (#31)
2. Attach the FOAM Assembly (#15) to the FOAM Frame ASSY (#6) using:
 - one Cap $\Phi 60$ (#18)
 - two Big Collar $\Phi 90*\Phi 51.5*6$ (#20)
 - one Socket Head Cap Screw M10*25 (#29)

Note: Wrench Tighten Bolts and Nylon Lock Nuts.

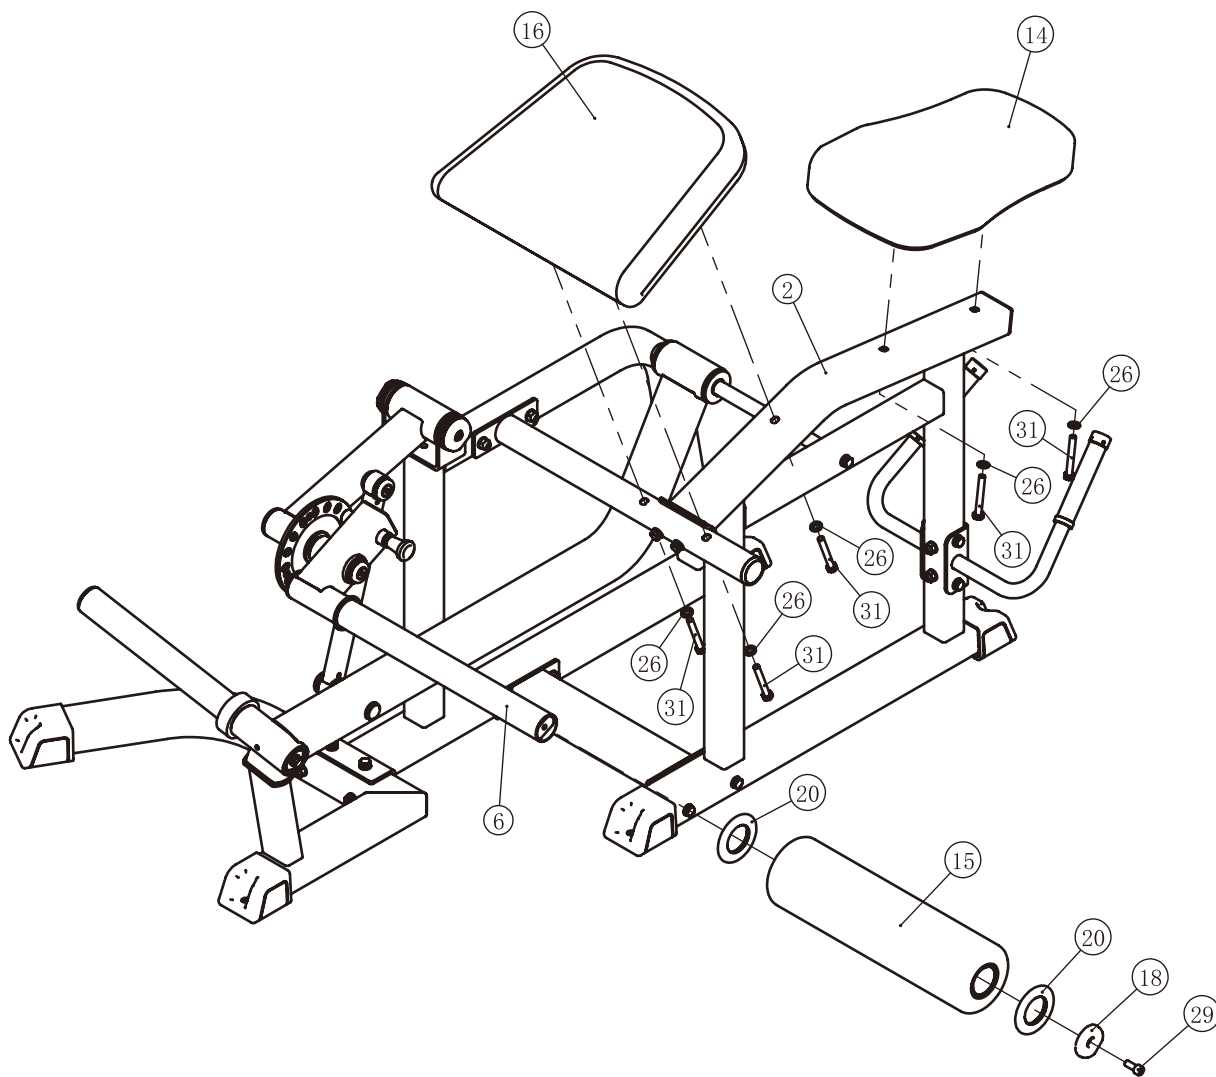


Adjust and Exercise Instruction

Weight Plate Installation Requirements

1. Please use Olympic Weight Plate which hole is greater than $\Phi 50\text{mm}$ and external diameter is less than $\Phi 450\text{mm}$.
2. The total weight of one side can not be greater than 150kg.
3. This equipment does not contains Weight Plates.

Foam adjustment & Exercise Instruction

1. Pull the Pull pin and adjust the Roller Foam to the desired position.
2. Make sure that the pin gets into the hole completely.
3. Hook both feet under the Roller Foam and curled legs.
4. Pause slightly then slowly return to the starting position.

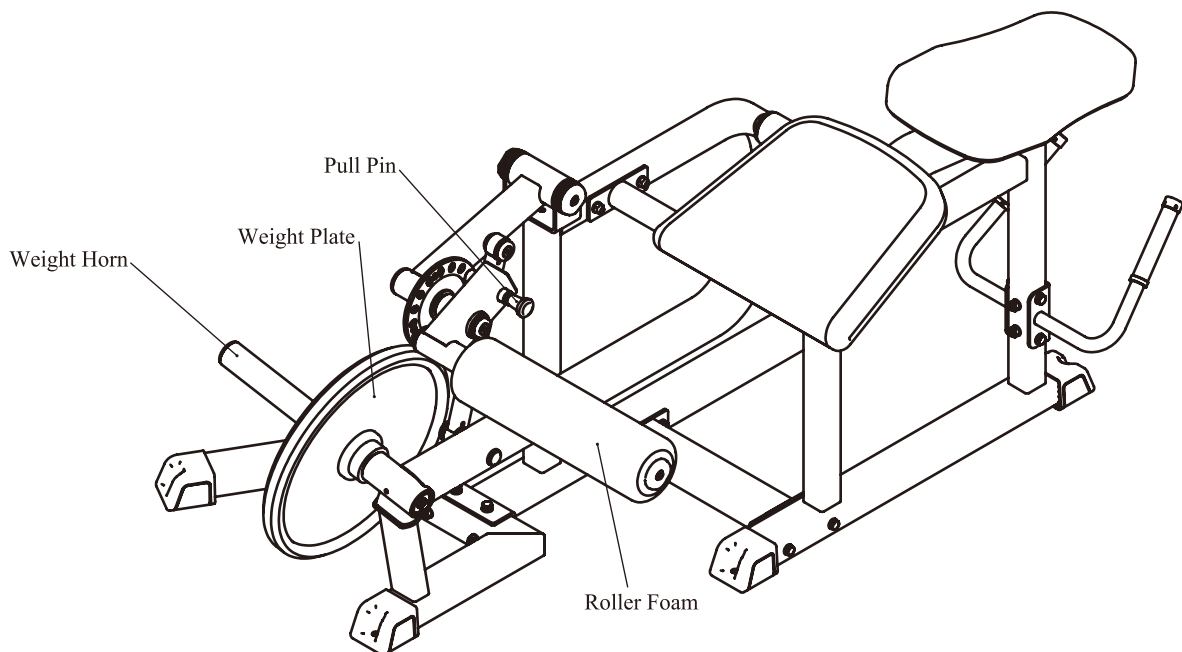

Maintenance Schedule

ROUTINE	COMMERCIAL MAINTENANCE	HOME MAINTENANCE	LATEST DATE ENTRY					
Inspect; Links, Pull Pins, Snap Locks, Swivels, Weight Stack Pins	DAILY	WEEKLY						
Clean; Upholstery	DAILY	WEEKLY						
Inspect; Cables or Belts and their tension	DAILY	WEEKLY						
Inspect; Accessory Bars, and Handles	WEEKLY	3 MONTHS						
Inspect; All Decals	WEEKLY	3 MONTHS						
Inspect; All Nuts and Bolts, Tighten if needed	WEEKLY	3 MONTHS						
Inspect; Anti-Skid Surface	WEEKLY	3 MONTHS						
Clean & Lubricate; Guide Rods with a Teflon (PTFE) based lubricant (Superlube)	MONTHLY	3 MONTHS						
Lubricate; Seat Sleeves, Turcite Bushings, Linear Bearing	MONTHLY	3 MONTHS						
Clean and Wax; All Glossy Finishes	6 MONTHS	YEARLY						
Repack with Grease; Linear Bearings	6 MONTHS	YEARLY						
Replace; Cables, Belts and Connecting Parts	YEARLY	3 YEARS						

Your equipment comes with a commercial maintenance decal. For personal, in home use, please follow the home maintenance schedule listed above.

General Maintenance Information

Links, Pull-Pins, Snap Hooks, Swivels, Weight Stack Pins:

- * Check all pieces for signs of visible wear or damage.
- * Check springs in snap hooks and pull-pins for proper tension and alignment.
- * If the spring sticks or has lost its rigidity, replace it immediately.

Upholstery:

- * To ensure prolonged upholstery life and proper hygiene, all upholstered pads should be wiped down with a damp cloth after every workout.
- * Periodically take the time to use a mild soap or an approved vinyl upholstery cleaner to deter the onset of cracking or drying. Avoid using any abrasive cleaners or cleaners not intended for use on vinyl.
- * Replace ripped or worn upholstery immediately.
- * Keep sharp or pointed objects clear of all upholstery.

Decals:

- * Inspect and familiarize yourself with any safety warnings or other user information posted on each decal.

Nuts and Bolts:

- * Inspect all nuts and bolts for any loosening and tighten if needed.
- * Go through a re-tightening sequence periodically to ensure that all hardware is tensioned proper.

Anti-Skid Surfaces:

- * These surfaces are designed to supply secure footing and need to be replaced if they appear worn or become slippery.

Belts and Cables:

- * We use only high quality belt, and mil-spec cables.
- * Visually inspect the belts and cables for fraying, cracking, peeling or discoloration.
- * While the machine is not in use, carefully run your fingers along the belt or cable to feel for thinning or bulging areas.
- * Replace belts and cables immediately at the first signs of damage or wear. Do not use equipment until belts or cables have been replaced.

Belt and Cable Tension:

- * Referring to the Owners Manual, when belts or cables are used check all bolts attachments to be sure they are properly attached.
- * Check slack in cables and re-adjust cable tension if needed.

Seat Sleeves, Guide Rods:

- * Wipe down adjusting tubes with a dust free rag before applying lubricant.
- * Lubricate seat sleeves and Guide Rods with a Silicon or Teflon based lubricant spray.

Linear Bearings:

- * Referring to the Owners Manual carefully disassemble the bearing from its housing and place a finger full of light grease (lithium, super lube, etc.) into the inside of the bearing. Using your finger, press the grease into the ball-bearings and their tracks. repeat until the ball-bearing tracks are full of grease. Insert the shaft back into the bearing and wipe off excess grease.

PLEASE KEEP THIS FOR YOUR RECORDS

Weight Training Tips

Use this manual to guide you through the basic exercises you can perform on your equipment. To gain maximum results and avoid possible injury, consult a fitness professional to develop your complete exercise program.

Always consult your physician before starting any exercise program.

To be successful in your exercise program, it is important to develop an understanding of the basic principles of strength training. Now that you have your equipment, it is only natural that you want to get started immediately. First, determine a set of realistic goals and objectives for yourself. By deciding on an exercise plan that is right for you prior to starting, you will contribute significantly to your success.

Warm up properly before engaging in weight resistance training. Stretching, yoga, jogging, calisthenics or other cardiovascular exercise can help prepare your body for the heavier workload of lifting weights.

Learn how to perform the exercise correctly before using heavy weight. Correct form is important to avoid injury and to ensure that you work the proper muscle groups.

Know your limitations. If you are new to weight training or are embarking on an exercise regimen after a long layoff, start slowly and build foundational strength over a longer period of time.

Pay attention to your breathing. Exhale when you exert is a general rule of thumb. Never hold your breath.

