


Инструкция

Силовая скамья для ягодичных мышц и бицепса бедра Impulse HSP7013

Полезные ссылки:

[Силовая скамья для ягодичных мышц и бицепса бедра Impulse HSP7013 - смотреть на сайте](#)

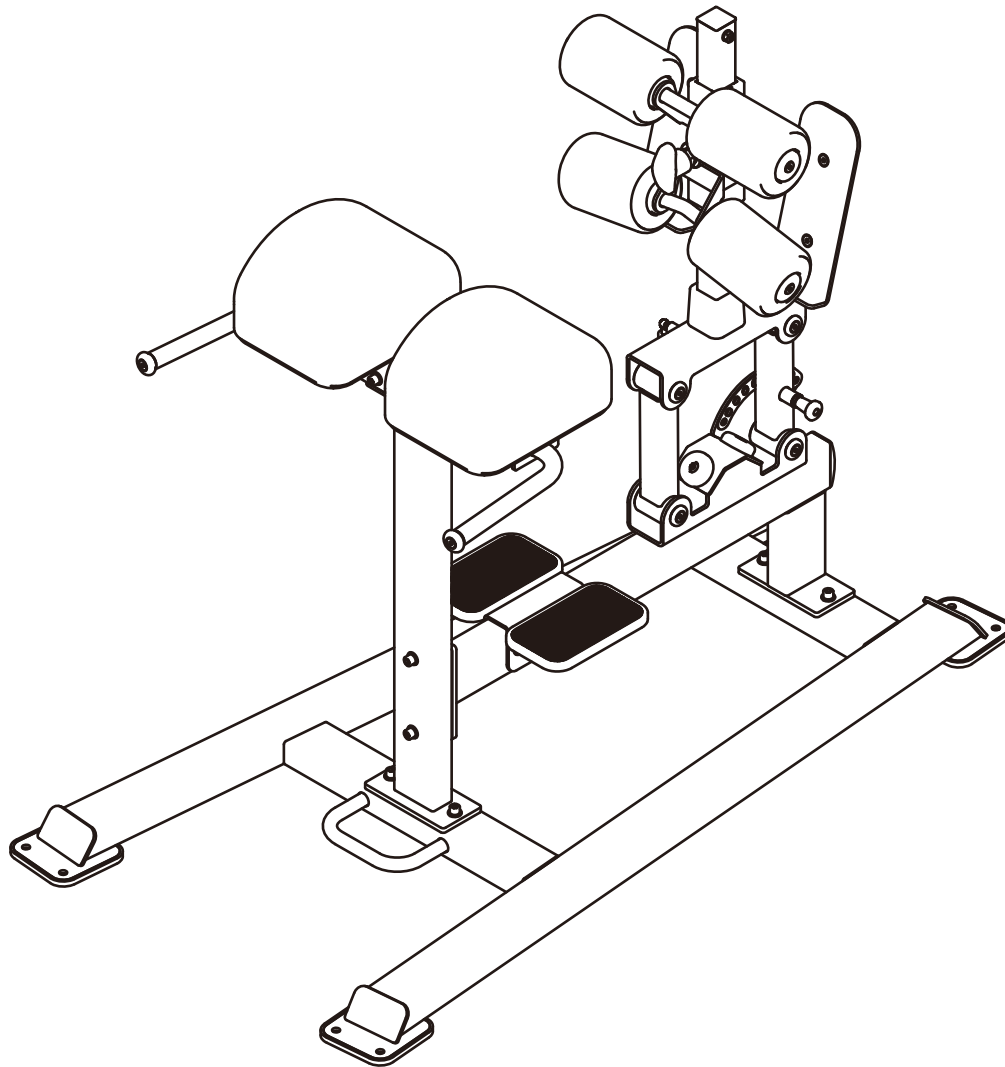

HSP7013

Glute-Ham Developer

OWNER'S MANUAL

20V

CAUTION! Read all precautions and instructions in this manual before using this equipment.

Table Of Contents

CAUTION!

Read all precautions and instructions in this manual before using this equipment.

Important Safety Instructions-----	3
Instructions-----	5
Exploded View and Parts List-----	6
Measurement Guide-----	13
Assembly Instructions-----	14
Assembly-----	15
Adjust Instructions and Exercise Instructions-----	19
Maintenance Schedule-----	20
General Maintenance Information-----	21
Weight Training Tips-----	22

Important Safety Instructions

Before beginning any fitness program, you should obtain a complete physical examination from your physician. When using exercise equipment, basic precautions should always be taken, including the following:

1. Read all instructions before using the equipment.
These instructions are written to ensure your safety and to protect the unit.
2. Use the equipment only for its intended purpose as described in this guide.
Do not use accessory attachments that are not recommended by the manufacturer: such attachments might cause injuries.
3. The product should only be used on a level surface and is with 0.5 meters space around the product.
Do not use the equipment outdoors.
4. Do not allow children on or near the equipment. And children are not allowed to use this equipment.
Teenagers should use this equipment with adult supervision.
5. Do not overexert yourself or work to exhaustion.
Do not attempt to lift more weight than you can control safely.
If you feel any pain or abnormal symptoms, stop your workout immediately and consult your physician.
6. This equipment is not used as medical apparatus and instruments.
7. Never operate the unit when it has been dropped or damaged.
Never drop or insert anything into any opening in the equipment.
Always check the unit and its cables before each use. Make sure that all fasteners and cables are secure and in good working condition.
Frayed or worn cables can be dangerous and may cause injury. Periodically check these cables for any indication of wear.
Keep hands, limbs, loose clothing and long hair well out of the way of moving parts.
8. Be careful when getting on or off the equipment.
9. Wear proper exercise clothing and shoes for your workout, no loose clothing.


Important Safety Instructions

Personal Safety During Assembly

Read each step in the assembly instructions and follow the steps in sequence. Do not skip ahead. If you skip ahead, you may learn later that you have to disassemble components and that you may have damaged the equipment.

Assemble and operate the equipment on a solid, level surface. Locate the unit a few feet from walls or furniture to provide easy access. The equipment is designed for your enjoyment. By following these precautions and using common sense, you will have many safe and pleasurable hours of healthful exercise with the equipment.

Training Area and Free Area

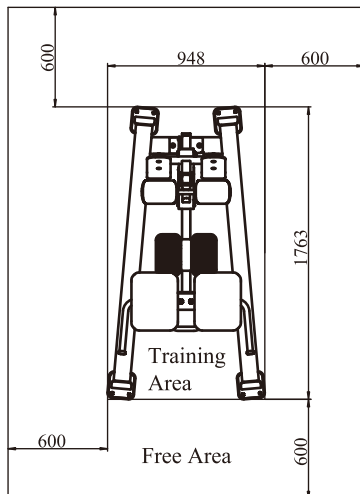

Specifications

Class: S

Maximum User Weight: 150kg/ 330lbs

Product Dimension: 1763*948*1396mm

Product Total Surface: 1763*948mm


Product Total Mass:

Instructions


Before beginning assembly please take the time to read instructions thoroughly. Please use the various lists in this manual to make sure that all parts have been included in your shipment. When ordering, use part number and description from the lists. Use only our replacement part when servicing. Failure to do so will void your warranty and could result in personal injury.

The equipment is designed to provide the smoothest, most effective exercise motion possible. After assembly, you should check all functions to ensure correct operation. If you experience problems, first recheck the assembly instructions to locate any possible errors made during assembly. If you are unable to correct the problem, call your authorized dealer. Be sure to have your serial number and this manual when calling. When all parts have been accounted for, continue on.


Tools Required

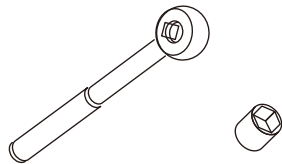


Ratchet Wrench and Socket




Adjustable Wrench



Rubber Mallet



Hex Key Wrench Set



Phillips Screwdriver


Exploded View and Parts List

Overall

ItemNo.	Grade No.	Part No.	Description	QTY
1	1	HSP701301ASSY	Base Frame ASSY	1
2	2	HSP70130200	Standing Frame	1
3	3	HSP701303ASSY	Beam Frame ASSY	1
4	4	HSP701304ASSY	Handle Frame ASSY	1
5	5	HSP701305ASSY	Auxiliary Pedal Secondary ASSY	1
6	6	ST701308ASSY	Adjustable Frame ASSY	1
7	7	ST701309ASSY	Upper Sliding Frame ASSY	1
8	8	ST701310ASSY	Adjustable Connecting Rod ASSY	1
9	9	ST701311ASSY	Connecting Rod ASSY	1
10	10	IE950221ASSY	Short FOAM ASSY	4
11	11	HSP70135100	Lumbar Pad	2
12	12	ST70131800	Axis	4
13	13	QD22-480-400N	Gas Spring	1
14	14	IN-D21202000	Cover	8
15	15	IE95029100	Plastic Ring	4
16	16	IE950716500	Aluminum Cover $\Phi 60 \times 11.6$	4
17	17	GB70M12*35DHS20	Socket Head Cap Screw M12*35	4
18	18	GB70M12*70DHS20	Socket Head Cap Screw M12*70	2
19	19	GB70M12*80DHS20	Socket Head Cap Screw M12*80	4
20	20	GB70M12*125DHS20	Socket Head Cap Screw M12*125	2
21	21	GB70M10*30DHS20	Socket Head Cap Screw M10*30	8
22	22	CNLM10*35*35DS20	Socket Head Cap Screw M10*35	4
23	23	CNLM10*30*30DS20	Socket Head Cap Screw M10*30	8
24	24	GB9510DHS2	Flat Washer $\Phi 11 \times \Phi 20 \times 2$	8
25	25	GB9512DHS2	Flat Washer $\Phi 13 \times \Phi 24 \times 2.5$	18
26	26	NM12DHS2	Nylon Lock Nut M12	6
27	27	NBS6DHS	Hex Key S=6	1
28	28	NBS8DHS	Hex Key S=8	1
29	29	NBS10DHS	Hex Key S=10	1
30	30	LW200BS	Wrench $\Phi 6 \times 117$	1


Exploded View and Parts List

Overall

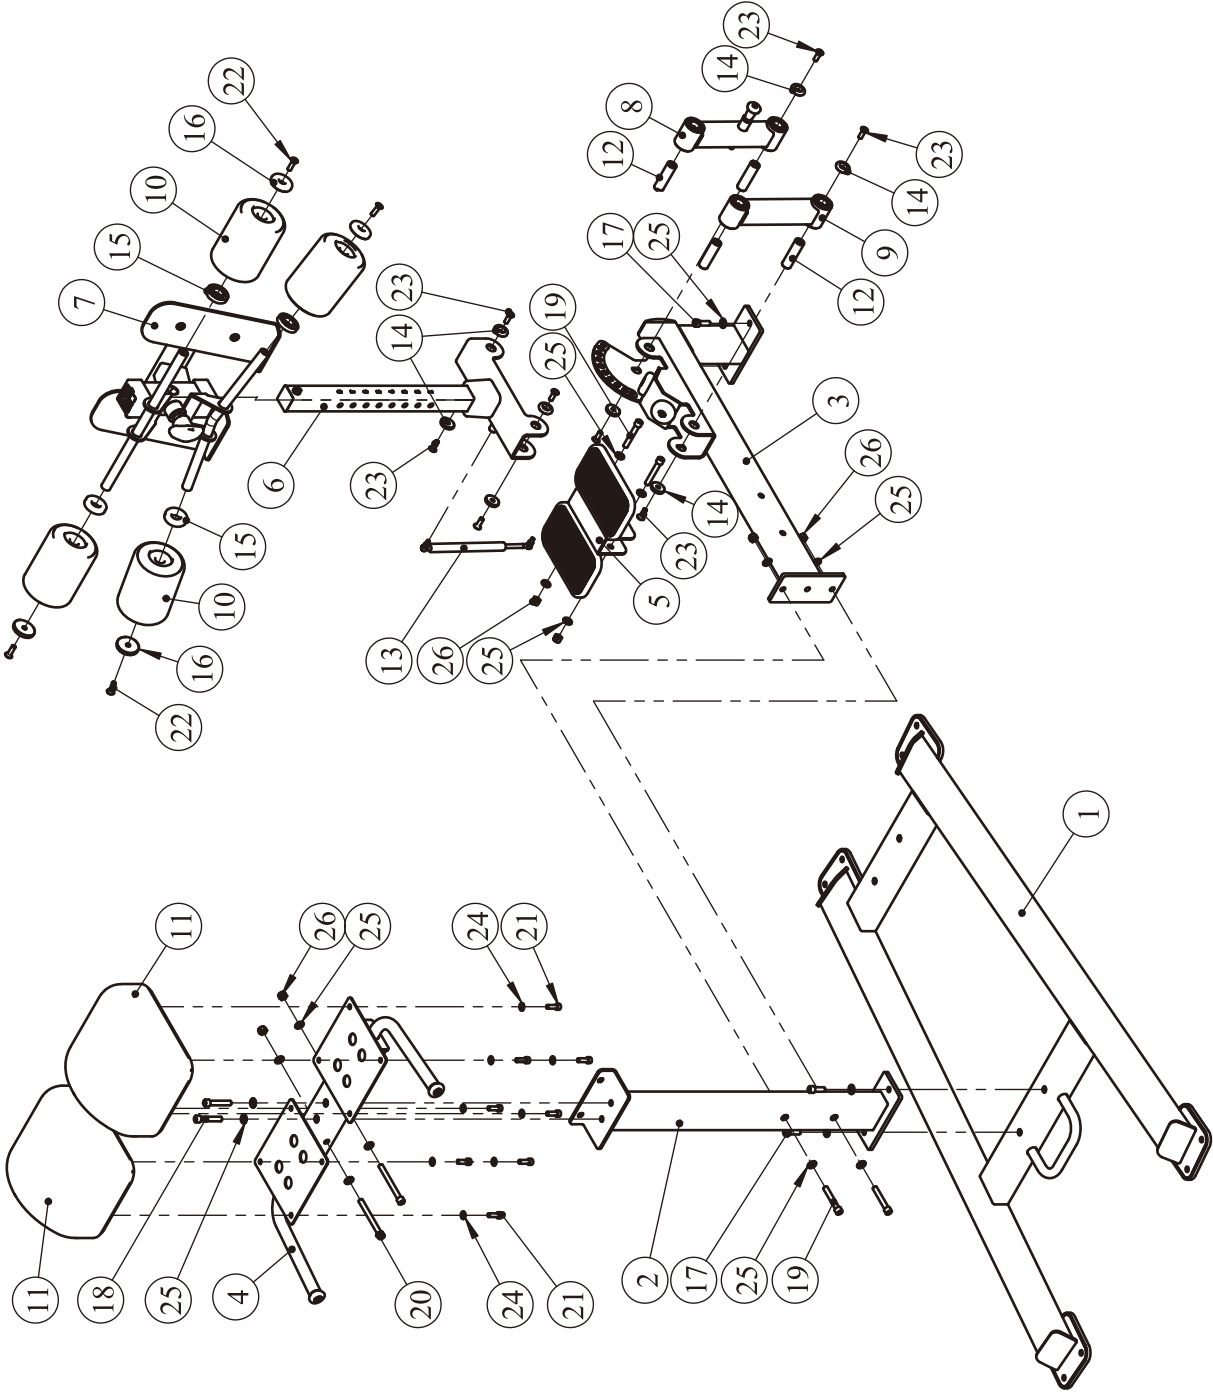


Exploded View and Parts List

Base Frame ASSY

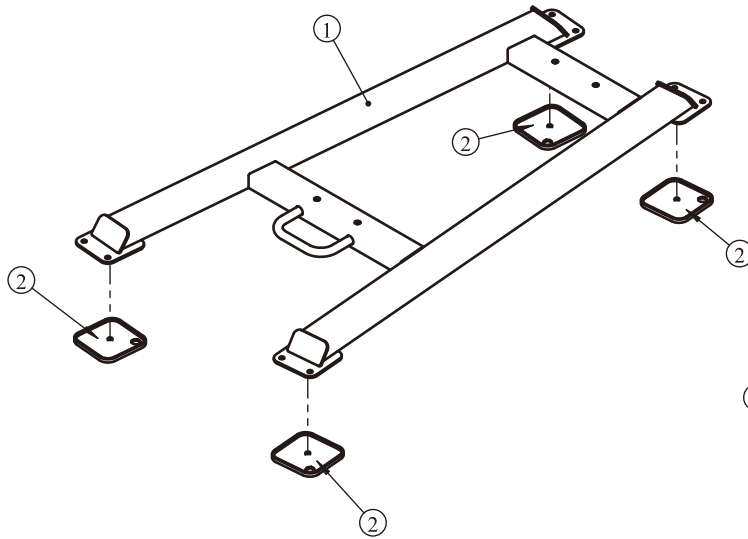

Beam Frame ASSY

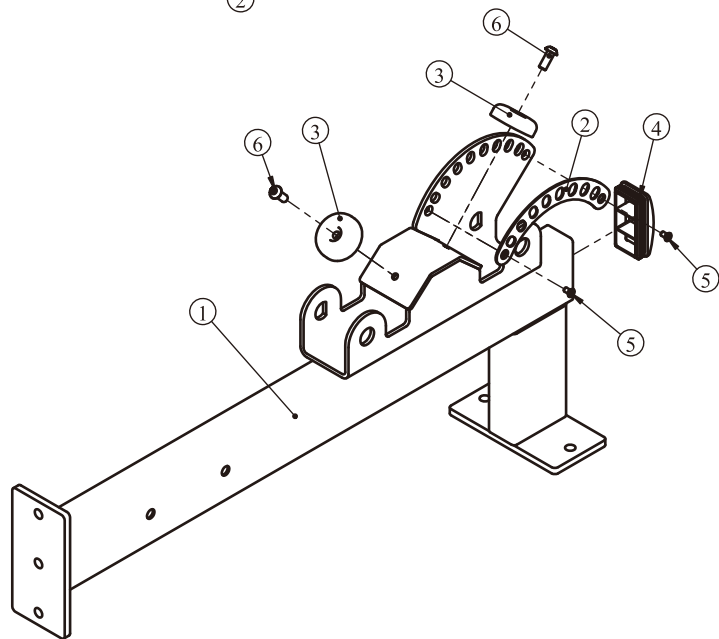


ItemNo.	Grade No.	Part No.	Description	QTY
1	1.1	HSP70130100	Base Frame	1
2	1.2	CWRVL0051200	Rubber Foot	4

ItemNo.	Grade No.	Part No.	Description	QTY
1	3.1	HSP70130300	Beam Frame	1
2	3.2	ST70131200	Lining Board	1
3	3.3	FS552300	Cushion	2
4	3.4	VLP8000	Arc Pipe Plug	1
5	3.5	CNLM6*12DS20	Flat Head Cap Screw M6*12	2
6	3.6	PNLM10*25DHS20	Disk Head Cap Screw M10*25	2

Exploded View and Parts List

Handle Frame ASSY

Auxiliary Pedal Secondary ASSY

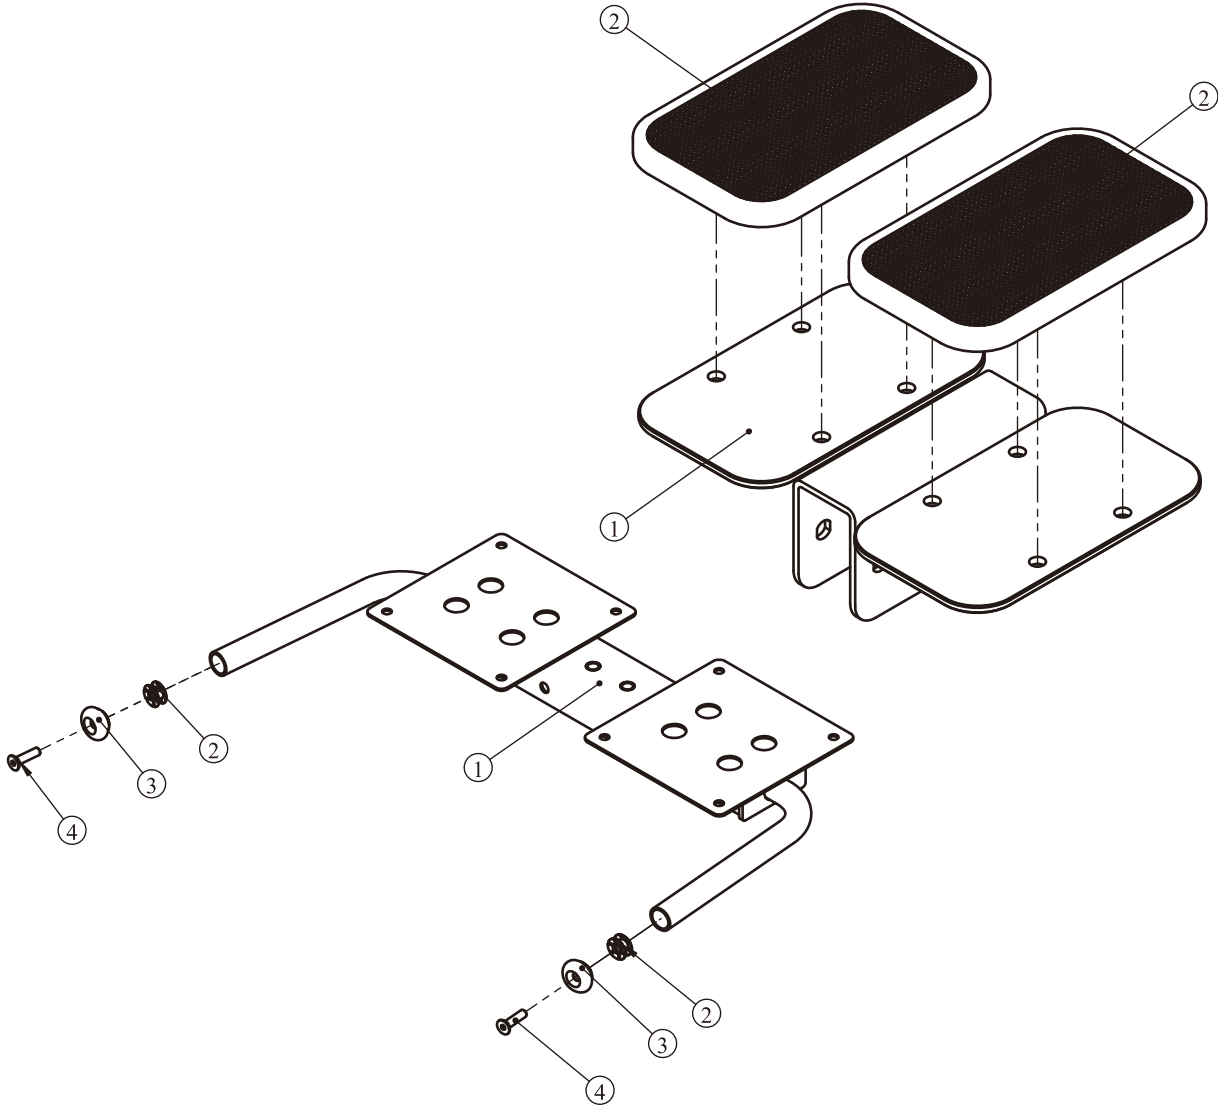


ItemNo.	Grade No.	Part No.	Description	QTY
1	4.1	HSP70130400	Handle Frame	1
2	4.2	IF81212700	Sun Nut	2
3	4.3	IT9030B9500	Cap	2
4	4.4	CNLM10*40*40DS20NL	Socket Head Cap Screw M10*30	2

ItemNo.	Grade No.	Part No.	Description	QTY
1	5.1	HSP70130500	Auxiliary Pedal Secondary	1
2	5.2	XL2-40003000	Big Foot Pad	2

Exploded View and Parts List


Adjustable Frame ASSY

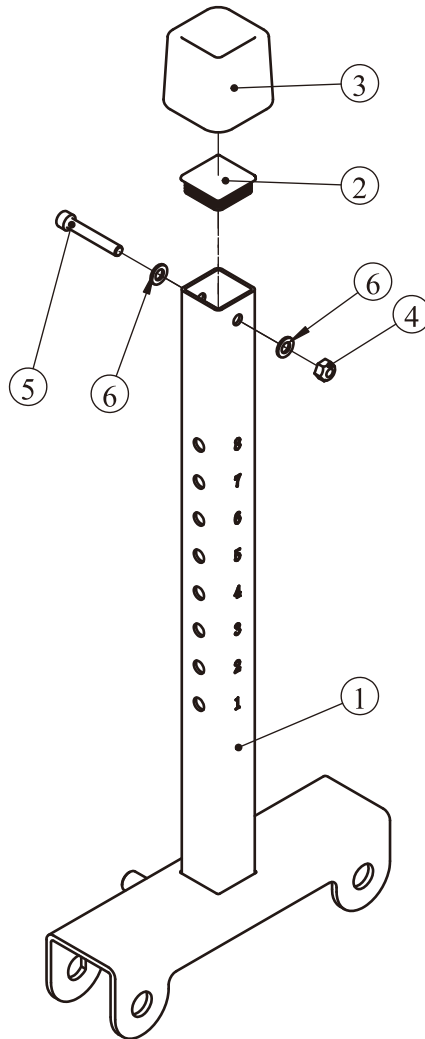

ItemNo.	Grade No.	Part No.	Description	QTY
1	6.1	ST70130800	Adjustable Frame	1
2	6.2	KPSFID3000	Plug □50.8	1
3	6.3	ST70131600	cushion collar	1
4	6.4	NM10DS2	Nylon Lock Nut M10	1
5	6.5	GB70M10*65DS20	Socket Head Cap Screw M10*65	1
6	6.6	GB9510DS2	Flat Washer Φ11*Φ20*2	2

Exploded View and Parts List


Upper Sliding Frame ASSY

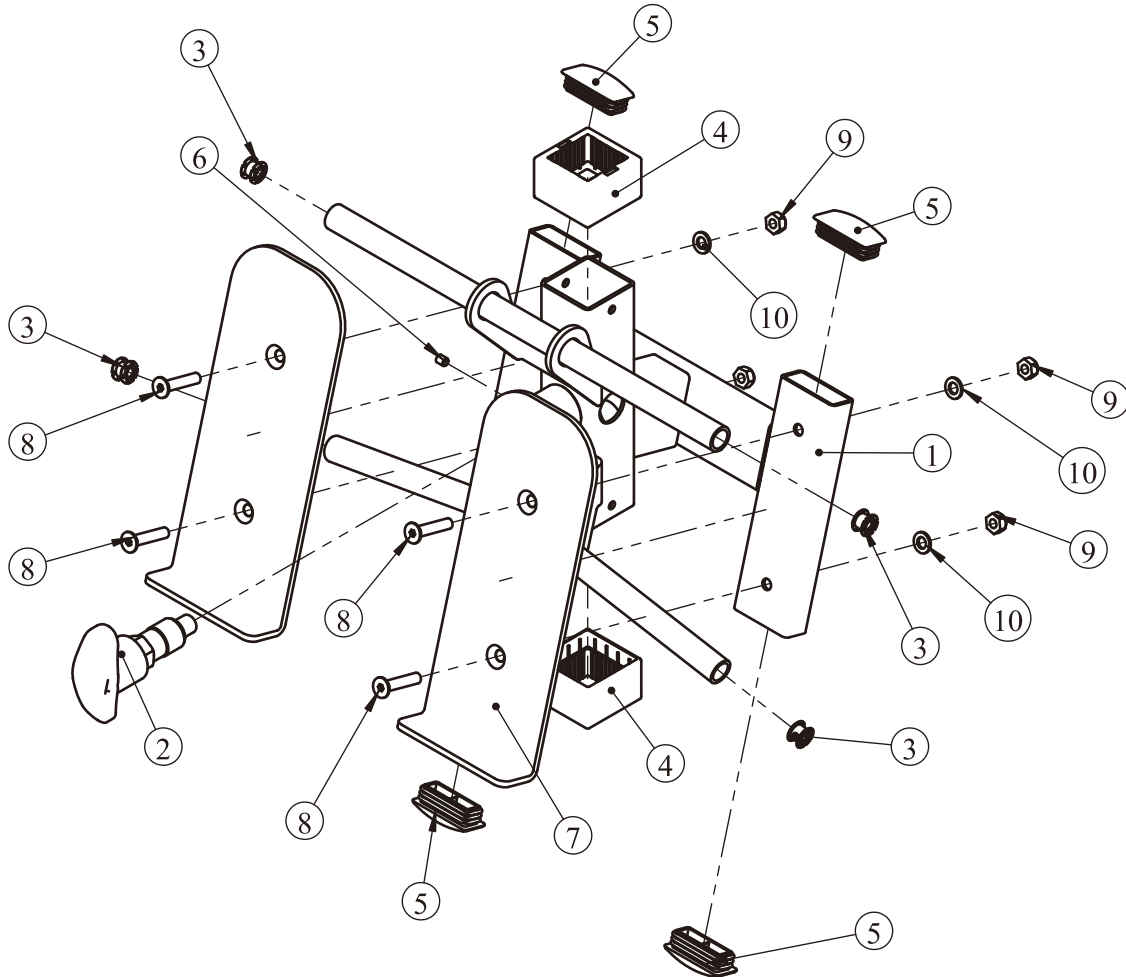


ItemNo.	Grade No.	Part No.	Description	QTY
1	7.1	ST70130900	Upper Sliding Frame	1
2	7.2	ST70471600	Adjustable Pin	1
3	7.3	IF81165000	Sun Nut	4
4	7.4	KPSOB2100V1	Tube Guide	2
5	7.5	IN-D10134200	Plug □30*70	4
6	7.6	GB77M8*10N19	Set Screw M8*10	1
7	7.7	ST70131300V1	Aluminum pedal	2
8	7.8	CNLM10*50DS20	Flat Head Cap Screw M10*50	4
9	7.9	NM10DS2	Nylon Lock Nut M10	4
10	7.10	GB9510DS2	Flat Washer Φ11*Φ20*2	4

Exploded View and Parts List

Adjustable Connecting Rod ASSY

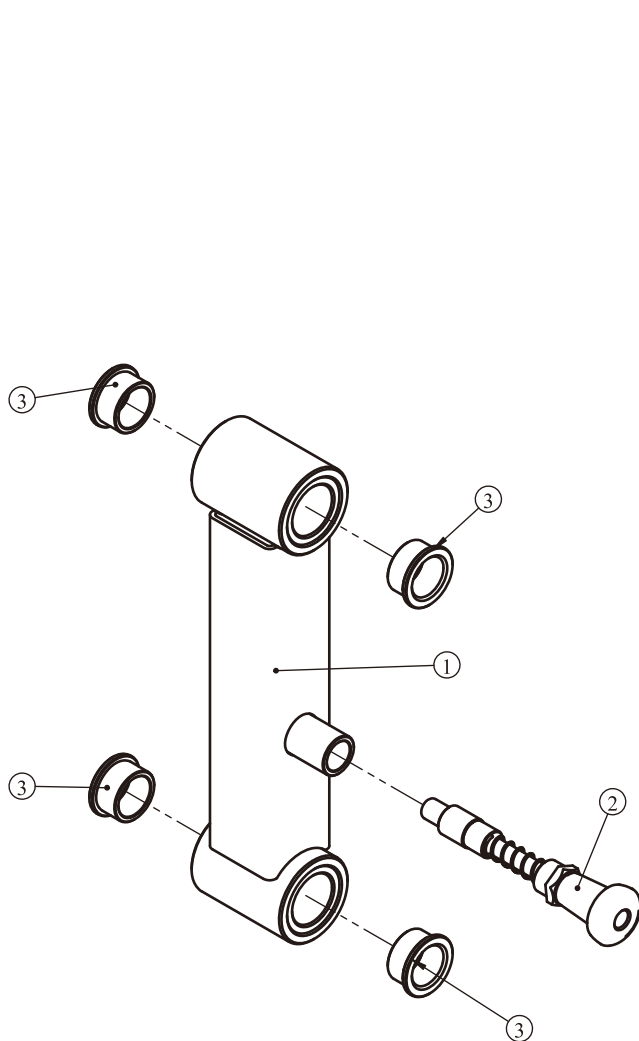



Connecting Rod ASSY

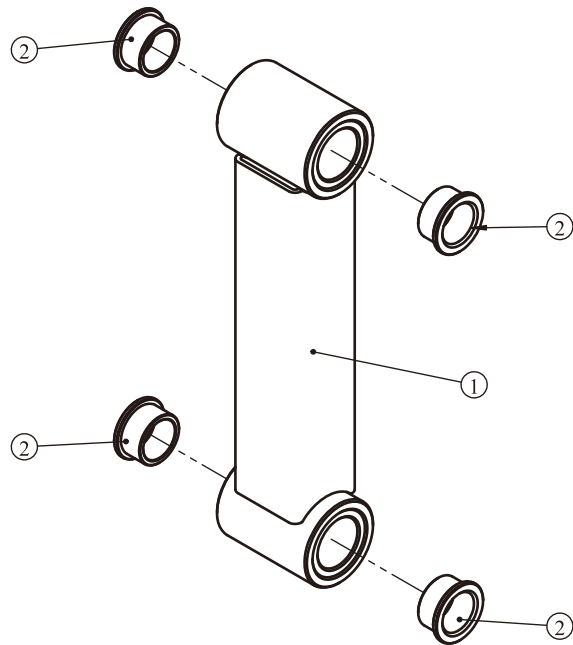

ItemNo.	Grade No.	Part No.	Description	QTY
1	8.1	ST70131000	Adjustable Connecting Rod	1
2	8.2	ST70131700	Adjustable Pin ASSY	1
3	8.3	M02502000	Spacer Φ 38* Φ 32* Φ 25.4*18	4

ItemNo.	Grade No.	Part No.	Description	QTY
1	9.1	ST70131100	Connecting Rod	1
2	9.2	M02502000	Spacer Φ 38* Φ 32* Φ 25.4*18	4

Measurement Guide

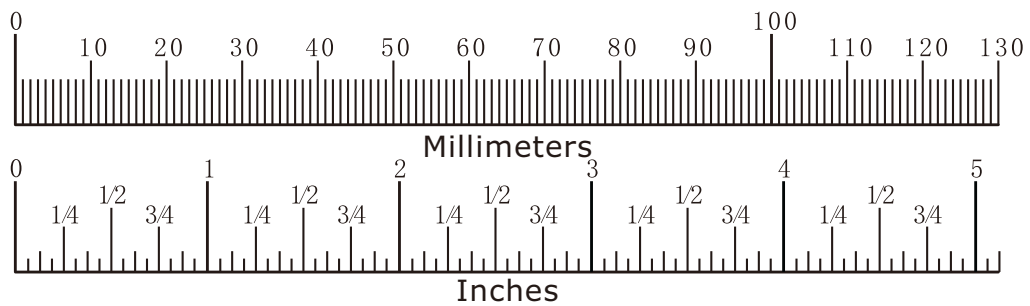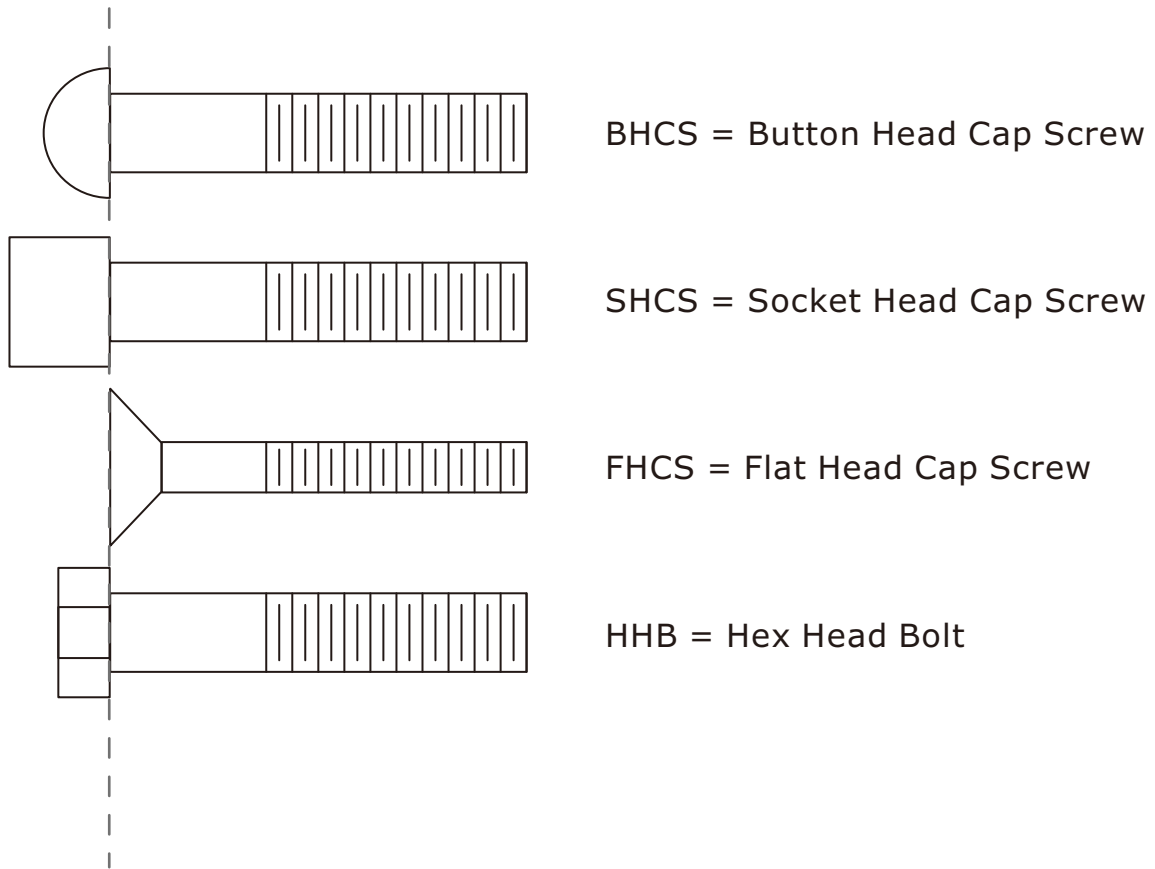

Diameter of bolt (mm/inch)	M6(1/4")	M8(5/16")	M10(3/8")	M12(1/2")	M16(5/8")
Tightening torque (N.m)	9~12	22~30	45~59	78~104	193~257
Operational methods for adult men	The strength of the wrist	The strength of the wrist and forearm	The strength of the entire arm	The strength of the arm and upper body	with all strength

Assembly Instructions

Assembly of the equipment takes professional installers about 2 hours. If this is the first time you have assembled this type of equipment, plan to spend more time. It is strongly recommended to assemble the equipment by professional installers. You may find it quicker, safer, easier to assemble this equipment with the help of a friend, as some of components may be large, heavy or awkward to handle alone. It is important that you assemble your product in a clean, clear, uncluttered area. This will enable you to move around the product while you are fitting components and reduce the possibility of injury during assembly.

NOTE


As with any assembled part, proper alignment and adjustment is critical. While tightening the fasteners, be sure to leave room for adjustments. Do not fully tighten the fasteners until instructed to do so. Be careful to assemble the components in the sequence presented in this guide.

Assembly

STEP 1

1. Attach the Standing Frame (#2) to the Base Frame ASSY (#1) using:
 - two M12*35 SHCS (#17)
 - two $\Phi 13*\Phi 24*2.5$ Flat Washer (#25)
2. Attach the Beam Frame ASSY (#3) to the Base Frame ASSY (#1) and the Standing Frame (#2) using:
 - two M12*35 SHCS (#17)
 - two M12*80 SHCS (#19)
 - six $\Phi 13*\Phi 24*2.5$ Flat Washer (#25)
 - two M12 Nylon Lock Nut(#26)

Note: Wrench Tighten Bolts and Nylon Lock Nuts.

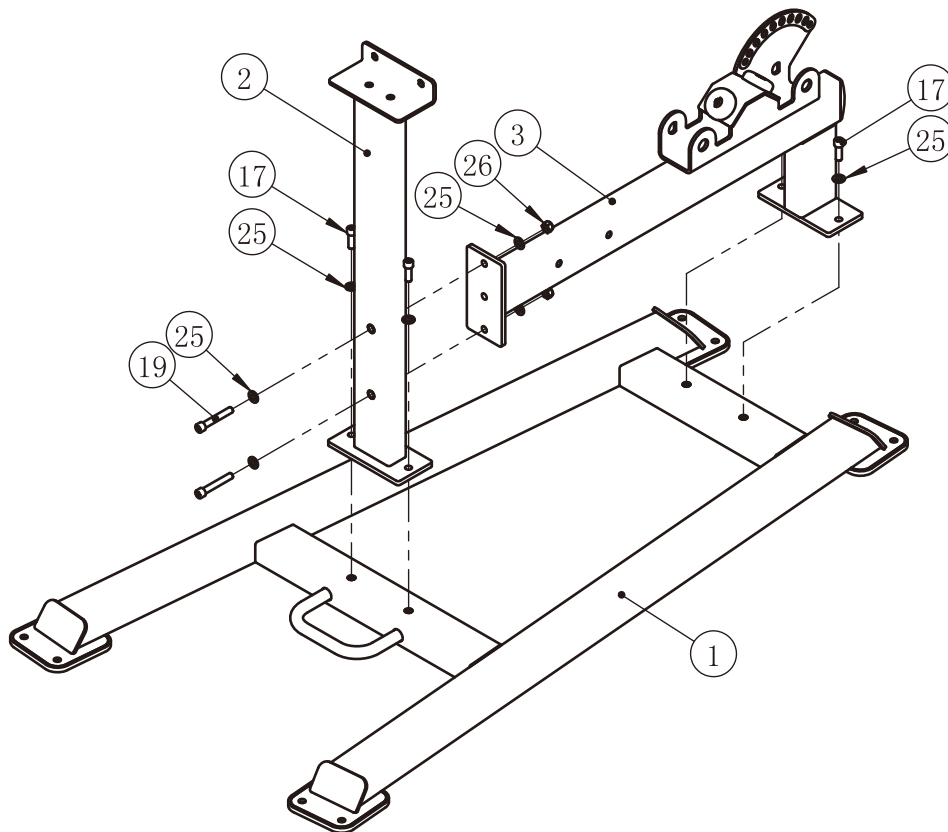


Assembly

STEP 2

1. Attach the Handle Frame ASSY (#4) to the Standing Frame (#2) using:
 - two M12*70 SHCS (#18)
 - two M12*125 SHCS (#20)
 - six $\Phi 13*\Phi 24*2.5$ Flat Washer (#25)
 - two M12 Nylon Lock Nut (#26)
2. Attach the Auxiliary Pedal Secondary ASSY (#5) to the Beam Frame ASSY (#3) using:
 - two M12*80 SHCS (#19)
 - four $\Phi 13*\Phi 24*2.5$ Flat Washer (#25)
 - two M12 Nylon Lock Nut (#26)

Note: Wrench Tighten Bolts and Nylon Lock Nuts.

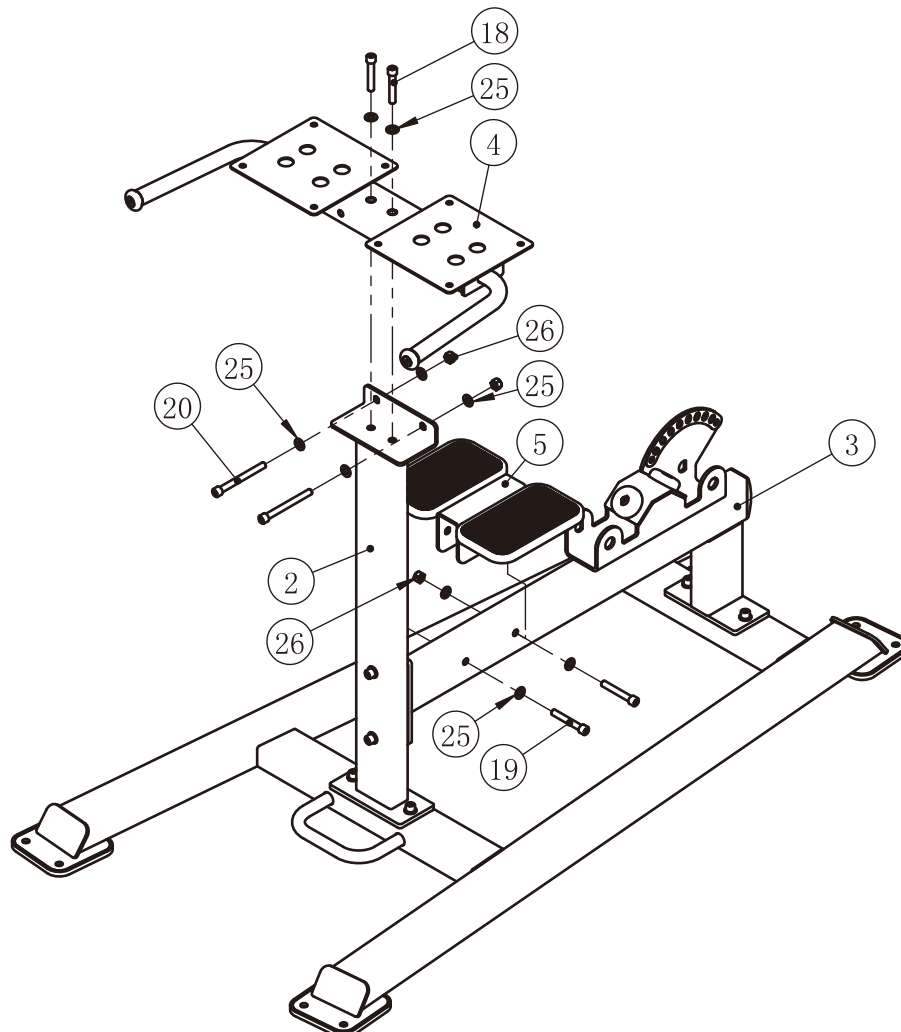


Assembly

STEP 3

1. Attach the Adjustable Connecting Rod ASSY (#8) and the Connecting Rod ASSY (#9) to the Beam Frame ASSY (#3) using:
 - four $\Phi 38*\Phi 10.5*8$ Cover (#14)
 - two $\Phi 25.4*89$ Axis (#12)
 - four M10*30 FHCS (#23)
2. Attach the Adjustable Frame ASSY (#6) to the Adjustable Connecting Rod ASSY (#8) and the Connecting Rod ASSY (#9) using:
 - four $\Phi 38*\Phi 10.5*8$ Cover (#14)
 - two $\Phi 25.4*89$ Axis (#12)
 - four M10*30 FHCS (#23)
3. Attach the Upper Sliding Frame ASSY (#7) to the Adjustable Frame ASSY (#6).

Note: Wrench Tighten Bolts and Nylon Lock Nuts.

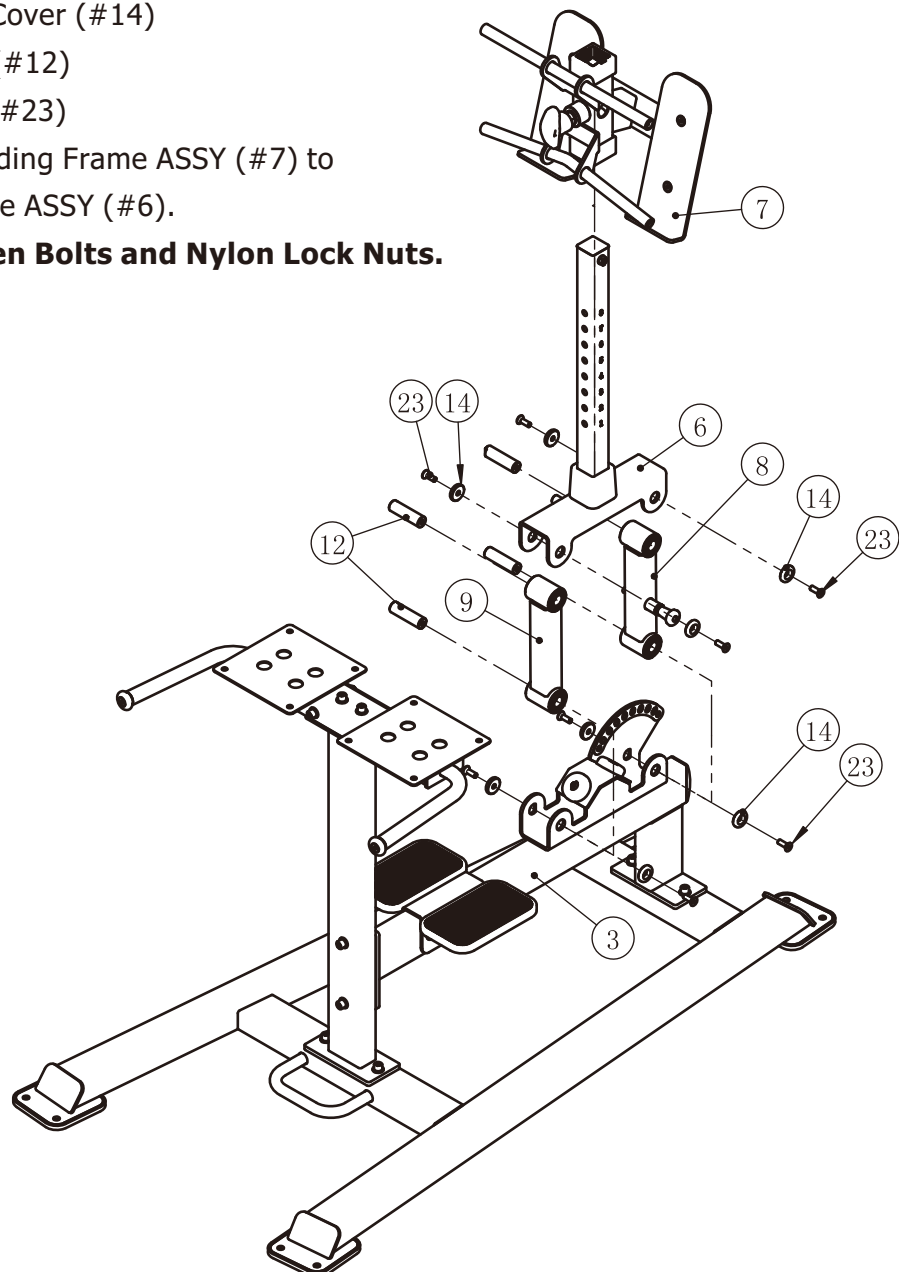


Assembly

STEP 4

1. Attach two Lumbar Pad (#11) to the Standing Frame (#2) using:
eight M10*30 SHCS (#21)
eight $\Phi 11*\Phi 20*2$ Flat Washer (#24)
2. Attach four Short FOAM ASSY (#10) and four Plastic Ring (#15) to the Upper Sliding Frame ASSY (#7) using:
four $\Phi 60*11.6$ Aluminum Cover (#16)
four M10*35 FHCS (#22)
3. Attach the Gas Spring (#13) to the Beam Frame ASSY (#3) and the Adjustable Frame ASSY (#6).

Note: Wrench Tighten Bolts and Nylon Lock Nuts.

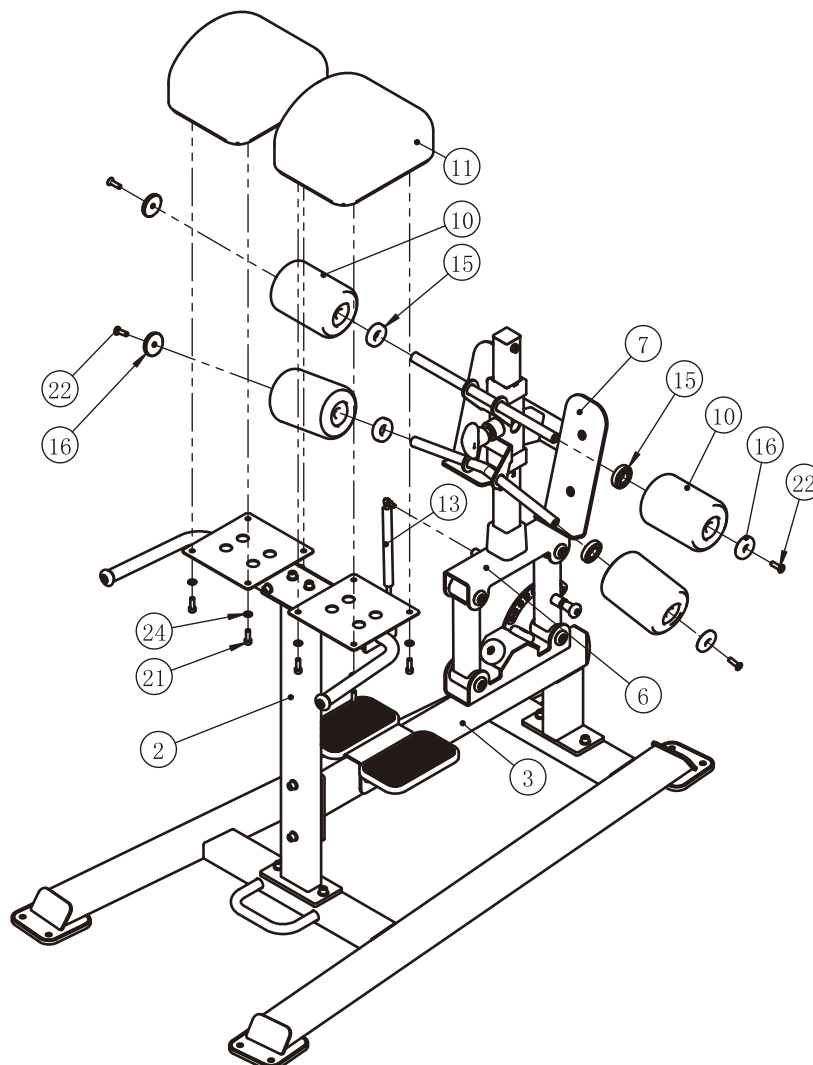


Adjust Instructions and Exercise Instructions

FOAM Adjust Instruction

1. Pull the Adjustable Pin ASSY and adjust FOAMS to desired position. Make sure the Adjustable Pin ASSY get into the hole completely.
2. Loose the Adjustable Pin and pull it then adjust FOAMS to desired position. Make sure the Adjustable Pin get into the hole completely, then lock the Adjustable Pin.

Exercise Instruction

1. Adjust FOAMS to desired position.
2. Then do abdominal or hyper extension exercises.

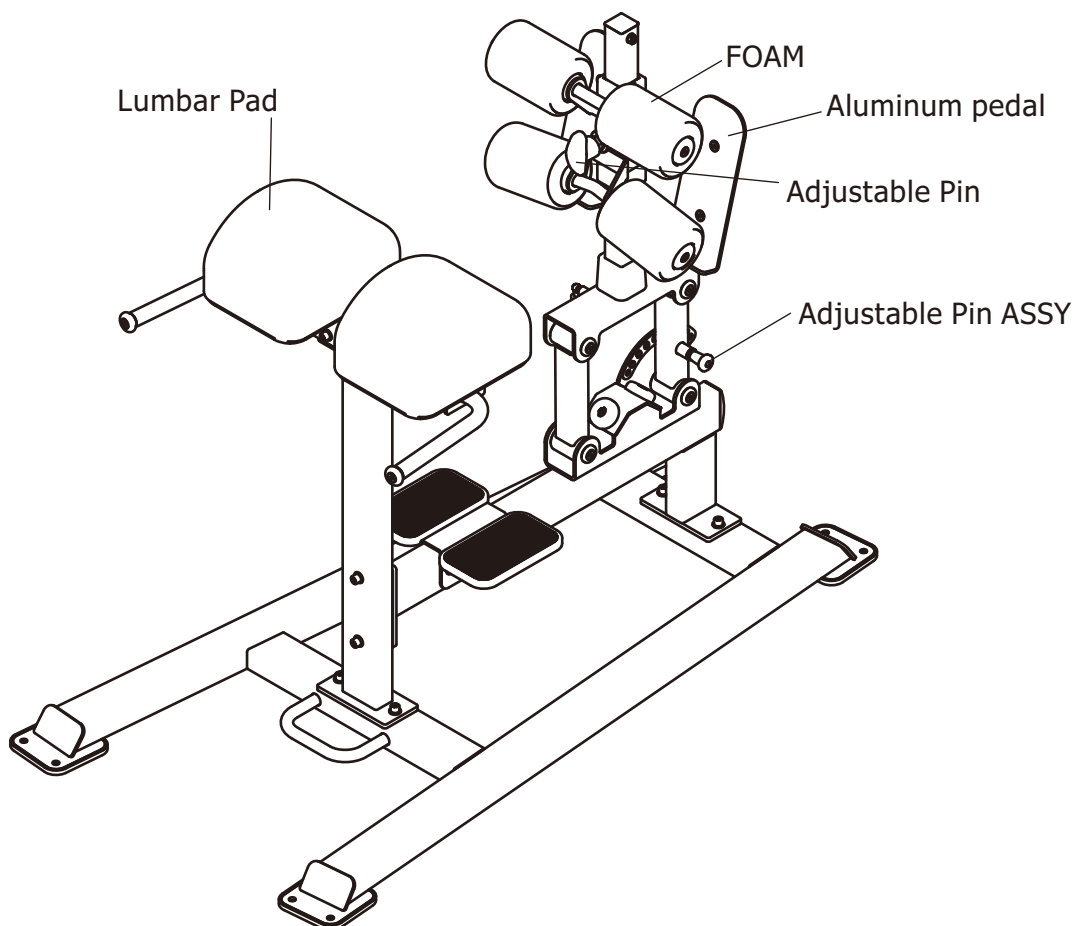

Maintenance Schedule

ROUTINE	COMMERCIAL MAINTENANCE	HOME MAINTENANCE	LATEST DATE ENTRY					
Inspect; Links, Pull Pins, Snap Locks, Swivels, Weight Stack Pins	DAILY	WEEKLY						
Clean; Upholstery	DAILY	WEEKLY						
Inspect; Cables or Belts and their tension	DAILY	WEEKLY						
Inspect; Accessory Bars, and Handles	WEEKLY	3 MONTHS						
Inspect; All Decals	WEEKLY	3 MONTHS						
Inspect; All Nuts and Bolts, Tighten if needed	WEEKLY	3 MONTHS						
Inspect; Anti-Skid Surface	WEEKLY	3 MONTHS						
Clean & Lubricate; Guide Rods with a Teflon (PTFE) based lubricant (Superlube)	MONTHLY	3 MONTHS						
Lubricate; Seat Sleeves, Turcite Bushings, Linear Bearing	MONTHLY	3 MONTHS						
Clean and Wax; All Glossy Finishes	6 MONTHS	YEARLY						
Repack with Grease; Linear Bearings	6 MONTHS	YEARLY						
Replace; Cables, Belts and Connecting Parts	YEARLY	3 YEARS						

Your equipment comes with a commercial maintenance decal. For personal, in home use, please follow the home maintenance schedule listed above.

General Maintenance Information

Links, Pull-Pins, Snap Hooks, Swivels, Weight Stack Pins:

- * Check all pieces for signs of visible wear or damage.
- * Check springs in snap hooks and pull-pins for proper tension and alignment.
- * If the spring sticks or has lost its rigidity, replace it immediately.

Upholstery:

- * To ensure prolonged upholstery life and proper hygiene, all upholstered pads should be wiped down with a damp cloth after every workout.
- * Periodically take the time to use a mild soap or an approved vinyl upholstery cleaner to deter the onset of cracking or drying. Avoid using any abrasive cleaners or cleaners not intended for use on vinyl.
- * Replace ripped or worn upholstery immediately.
- * Keep sharp or pointed objects clear of all upholstery.

Decals:

- * Inspect and familiarize yourself with any safety warnings or other user information posted on each decal.

Nuts and Bolts:

- * Inspect all nuts and bolts for any loosening and tighten if needed.
- * Go through a re-tightening sequence periodically to ensure that all hardware is tensioned proper.

Anti-Skid Surfaces:

- * These surfaces are designed to supply secure footing and need to be replaced if they appear worn or become slippery.

Belts and Cables:

- * We use only high quality belt, and mil-spec cables.
- * Visually inspect the belts and cables for fraying, cracking, peeling or discoloration.
- * While the machine is not in use, carefully run your fingers along the belt or cable to feel for thinning or bulging areas.
- * Replace belts and cables immediately at the first signs of damage or wear. Do not use equipment until belts or cables have been replaced.

Belt and Cable Tension:

- * Referring to the Owners Manual, when belts or cables are used check all bolt attachments to be sure they are properly attached.
- * Check slack in cables and re-adjust cable tension if needed.

Seat Sleeves, Guide Rods:

- * Wipe down adjusting tubes with a dust free rag before applying lubricant.
- * Lubricate seat sleeves and Guide Rods with a Silicon or Teflon based lubricant spray.

Linear Bearings:

- * Referring to the Owners Manual carefully disassemble the bearing from its housing and place a finger full of light grease (lithium, super lube, etc.) into the inside of the bearing. Using your finger, press the grease into the ball-bearings and their tracks. Repeat until the ball-bearing tracks are full of grease. Insert the shaft back into the bearing and wipe off excess grease.

PLEASE KEEP THIS FOR YOUR RECORDS

Weight Training Tips

Use this manual to guide you through the basic exercises you can perform on your equipment. To gain maximum results and avoid possible injury, consult a fitness professional to develop your complete exercise program.

Always consult your physician before starting any exercise program.

To be successful in your exercise program, it is important to develop an understanding of the basic principles of strength training. Now that you have your equipment, it is only natural that you want to get started immediately. First, determine a set of realistic goals and objectives for yourself. By deciding on an exercise plan that is right for you prior to starting, you will contribute significantly to your success.

Warm up properly before engaging in weight resistance training. Stretching, yoga, jogging, calisthenics or other cardiovascular exercise can help prepare your body for the heavier workload of lifting weights.

Learn how to perform the exercise correctly before using heavy weight. Correct form is important to avoid injury and to ensure that you work the proper muscle groups.

Know your limitations. If you are new to weight training or are embarking on an exercise regimen after a long layoff, start slowly and build foundational strength over a longer period of time.

Pay attention to your breathing. Exhale when you exert is a general rule of thumb. Never hold your breath.

